

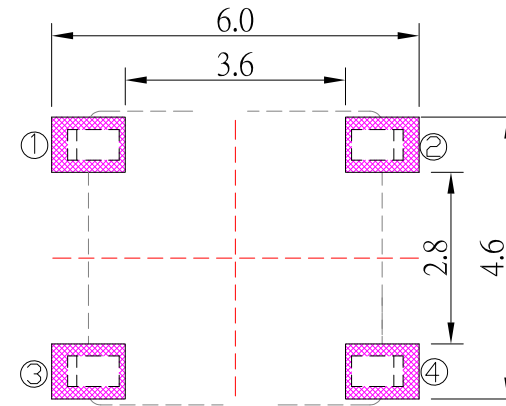
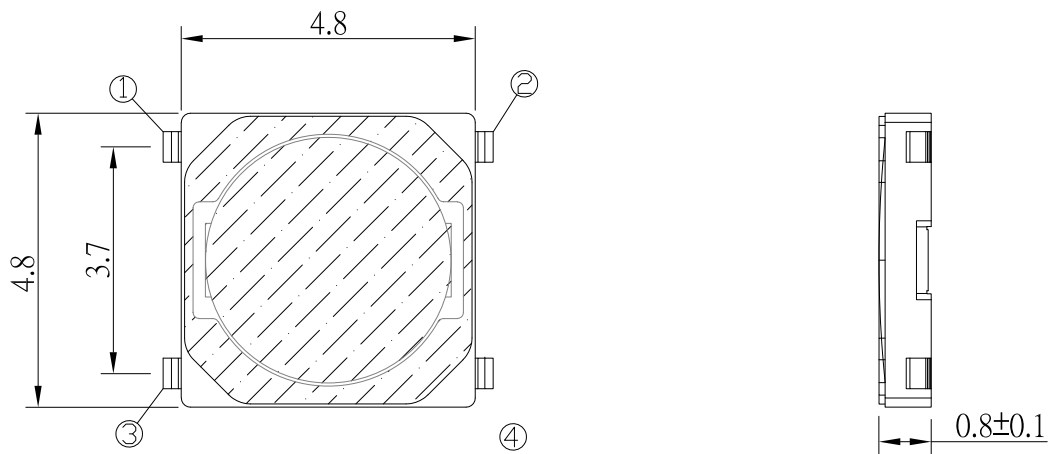




P.C.B LAYOUT

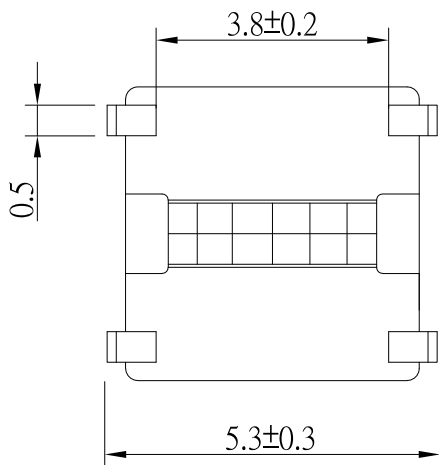

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA , 12V DC
Insulation Resistance	10MΩ Min.
Dielectric Withstanding Voltage	AC 250 V/ 1 min
Contact Resistance	100mΩ Max.
Travel	0.15 ± 0.10mm
Operating Force	2 160 ± 50gf 3 260 ± 50gf
Operating Life(cycles)	100,000

D	DUSTPROOF FILM	1	PI	Yellow
C	CONTACT	1	SUS	Ag plated
B	CASE	1	PA9T(Black)	
A	THERMINAL	4	PHOSPHOR BRONZE	Ag plated
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

1	更新樣式	Jack	071526
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	07/15/26	FINISH	MODLE	TACT SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	TS-A90M1PU-x-S410
Jacky Chen	07/15/26	1 : 1	PART NO.	TS-A90M1PU-x-S410
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	07/15/26			