



Model No.	Switching Position		
	B101	ON	NONE
Term Comm.	2-3	OPEN	2-1

SCHEMATIC



PCB LAYOUT MOUNTING

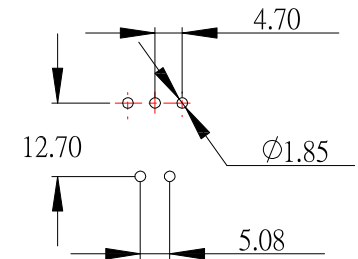

SPECIFICATIONS:

CONTACT RATING : 3 AMPS @120V AC or 28 VDC.
 1 AMPS @250V AC or 0.4VA AMPS @ 20 V AC or DC
 ELECTRICAL LIFE : 6,000 make-and break cycles at full load.
 CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 VDC.
 100 mA , for both coin silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30°C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 PLUNGER : Polybutylene terephthalate (PBT) (UL 94V-0)
 BUSHING : ZINC ALLOY.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver
 SWITCH SUPPORT : Brass, tin plated.

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Frank Wu	09/20/11		MODLE	TOGGLE PUSH SW
CHECKED BY:	DATE	FINISH	DWG NO.	TG-B101P1B2A3
Jacky Chen	09/20/11		PART NO.	TG-B101P1B2A3
APPROVED BY:	DATE	SCALE	1 of 1	
Tony Kao	09/20/11	SHEET NO.		

ITEM NO.	DESCRIPTION	DRAWN	DATE