
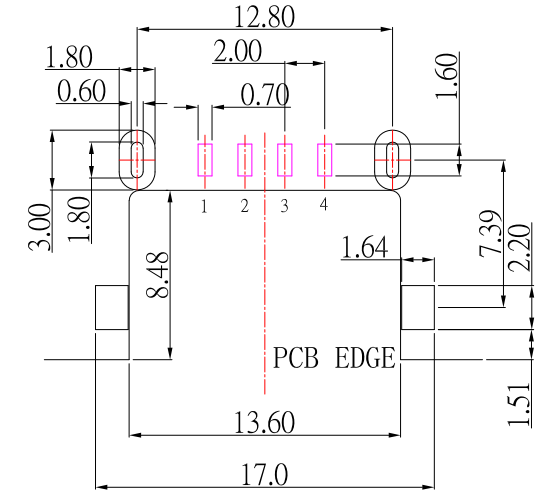
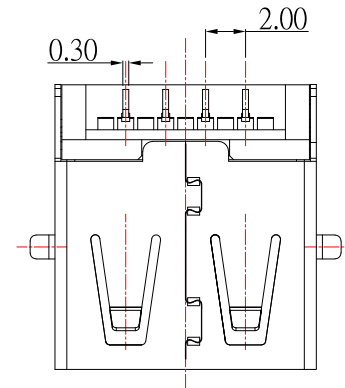
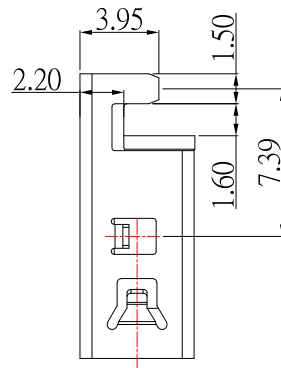
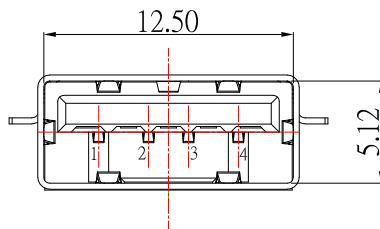
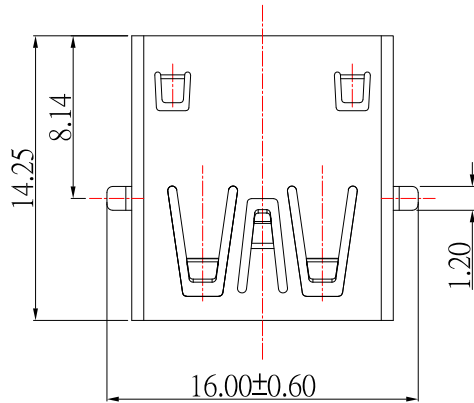


SUA-110E33A-x-S236

COLOR :

Black: B
White : W

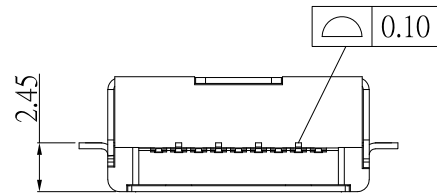

P.C.B LAYOUT

SPECIFICATIONS

Electrical:

- Rating: 30V DC , 1.5A
- Contact Resistance: 30 mΩ Max
- Dielectric Withstanding Voltage: 500 V AC
- Insulation Resistance: 1000 MΩ Min

Material:

- Housing: LCP
- Contact: Phosphor Bronze
- Shell: SUS

Finish:

- Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- Shell: Nickel under Plated surface layer

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

12/03/25

CHECKED BY:

Jacky Chen

DATE

12/03/25

APPROVED BY:

Tony Kao

DATE

12/03/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB AF 沉板 板上高H3.95MM 無捲邊 DIP 腳
外殼腳距7.39mm

SUA-110E33A-x-S236

SUA-110E33A-x-S236

SIZE

A4

VER

R2

ITEM NO.

DESCRIPTION

DRAWN

DATE

Jack

120325

Jack

112525

更新尺寸和公差

更新尺寸和樣式