
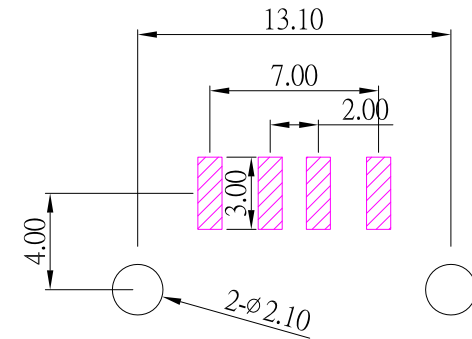
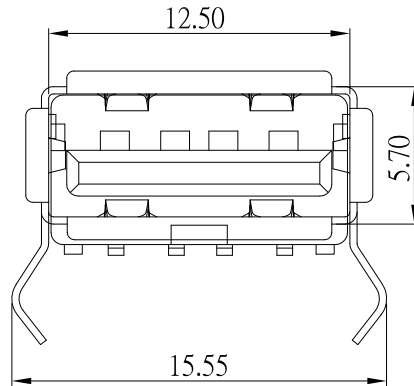


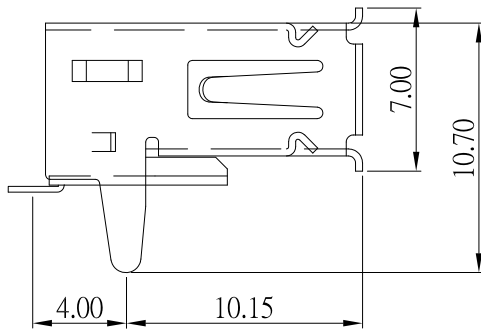

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:


- 1.Rating: 1.5A , 30V AC
- 2.Contact Resistance: 30 mΩ Max
- 3.Dielectric Withstanding Voltage: 500 V AC
- 4.Insulation Resistance: 1,000 MΩ Min
- 5.Operating Temperature: -35°C ~ 85°C

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

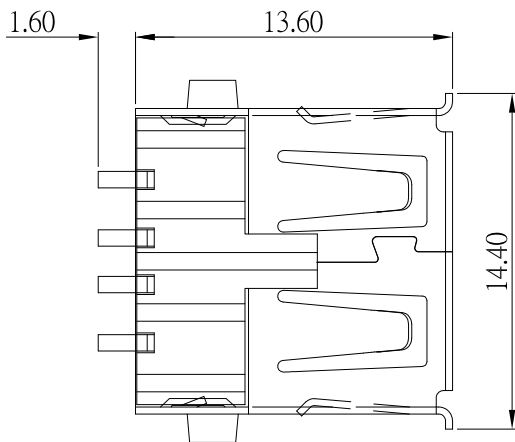

SUA-110M7Ax-x-S236

Shell Material :

Blank : BRASS

I : SPCC

COLOR :

Black: B

White : W

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
05/03/22

CHECKED BY:
Jacky Chen

DATE
05/03/22

APPROVED BY:
Tony Kao

DATE
05/03/22

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	USB AF SMT 無後蓋外殼彎角 反向
SCALE	DWG NO.	SUA-110M7Ax-x-S236
SHEET NO.	PART NO.	SUA-110M7Ax-x-S236

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新樣式	Jack	050322
1	更新圖面	Jack	090921