





SUA-110P13Cx-x-S236

SHELL :	鍍層厚度 :
Blank : BRASS	Blank : 1u"
I : SPCC	2 : 15u"
	3 : 30u"

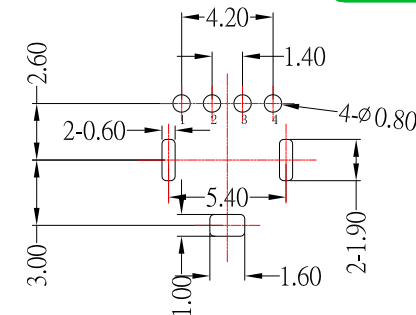

PCB LAYOUT MOUNTING PATTERN

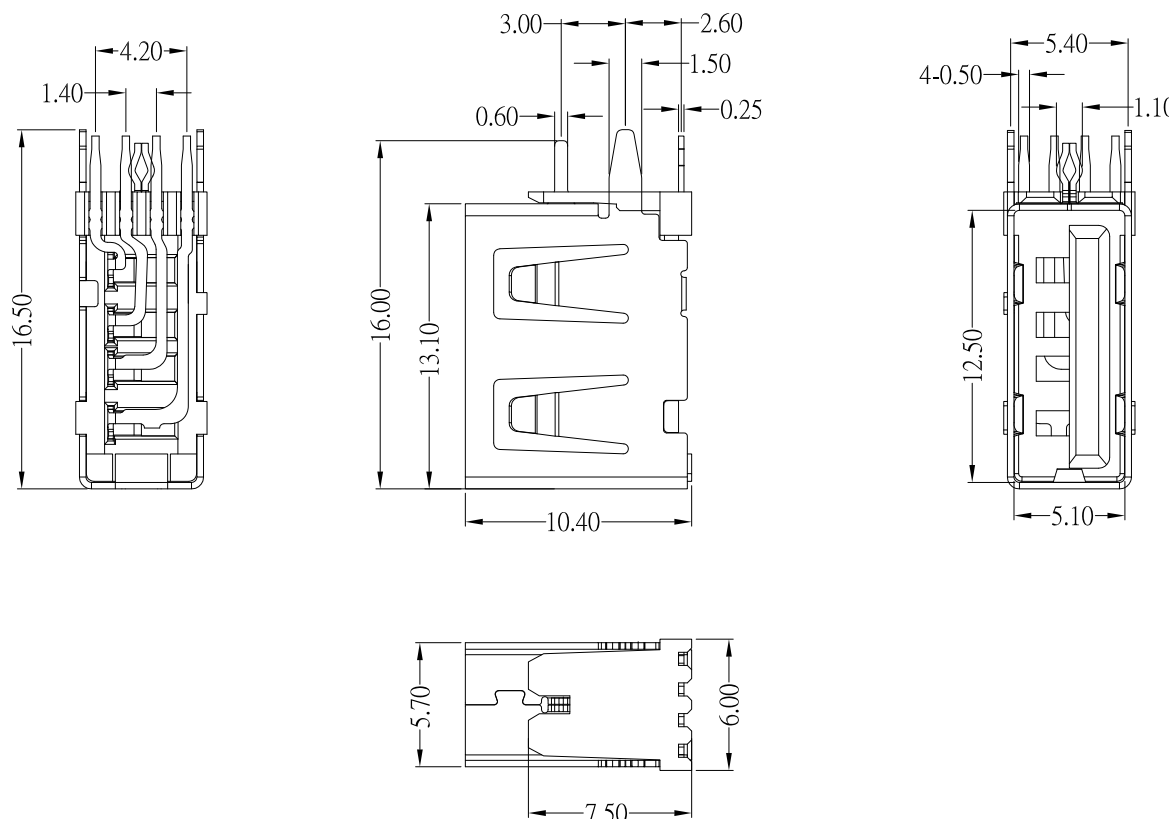

SPECIFICATIONS

Electrical:

1. Rated Current: 2.0 A Max
2. Dielectric Withstanding Voltage: AC 500 V / 1MIN
3. Insulation Resistance: 1,000 MΩ Min
4. Contact Resistance: 30 mΩ Max

Material:

1. Housing: PBT
2. Contact: PhosphorBronze
3. Shell: Brass / Spcc

Finish:

1. Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
2. Shell: Nickel under Plated surface layer

				建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.		DRAWN BY: Jack Lu		DATE: 05/12/20	MAT'L	TITLE: CONNECTOR	SIZE: A4
						CHECKED BY: Jacky Chen		DATE: 05/12/20			
				TOLERANCE UNLESS OTHERWISE STATED :		3RD. ANGEL'S	UNITS	DATE: 05/12/20	SCALE: 1 : 1	DWG NO. SUA-110P13Cx-x-S236	VER: A
				Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3							MM
ITEM NO.	DESCRIPTION	DRAWN	DATE								