





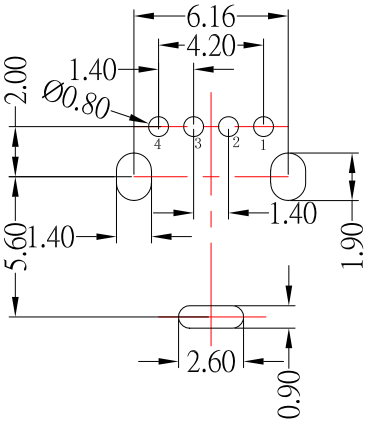


SUA-110P4x-x-S236

SHELL :	COLOR :
Blank : BRASS	Black: B
I : SPCC	White : W

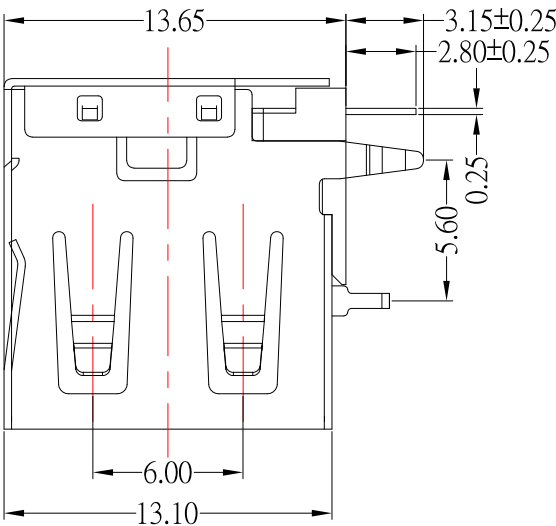

PCB LAYOUT

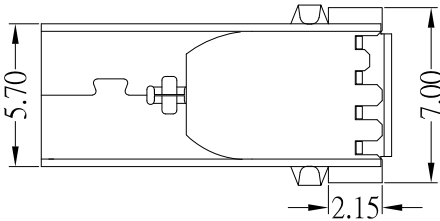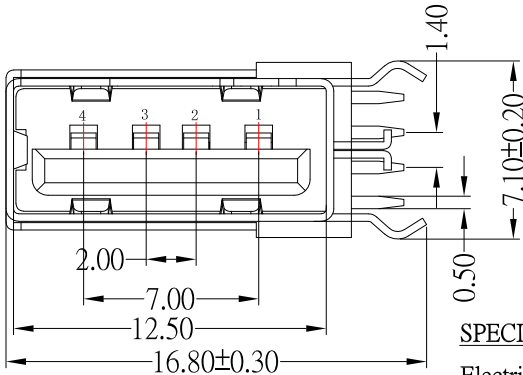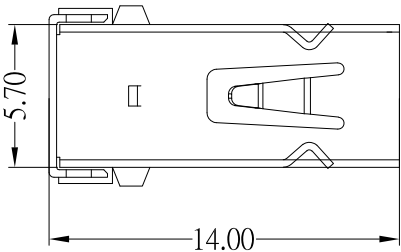

SPECIFICATIONS

Electrical:

- 1.Rating: 30V , 1.5A
- 2.Dielectric Withstanding Voltage: AC 500 V / 1MIN
- 3.Insulation Resistance: 1000 MΩ Min
- 4.Contact Resistance: 30 mΩ Max

Material:

- 1.Housing: PBT
- 2.Terminal: Brass
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	06/23/25	FINISH	MODLE	USB AF側插短體Y型腳無捲邊 (L=14.0)
CHECKED BY:	DATE	SCALE	DWG NO.	SUA-110P4x-x-S236
Jacky Chen	06/23/25	1 : 1	PART NO.	SUA-110P4x-x-S236
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	06/23/25			

1	更新圖面	Jack	062325
ITEM NO.	DESCRIPTION	DRAWN	DATE