

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:


- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30 VDC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC AT Sec Level
- 5.Insulation Resistance: 1,000 MΩ Min

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

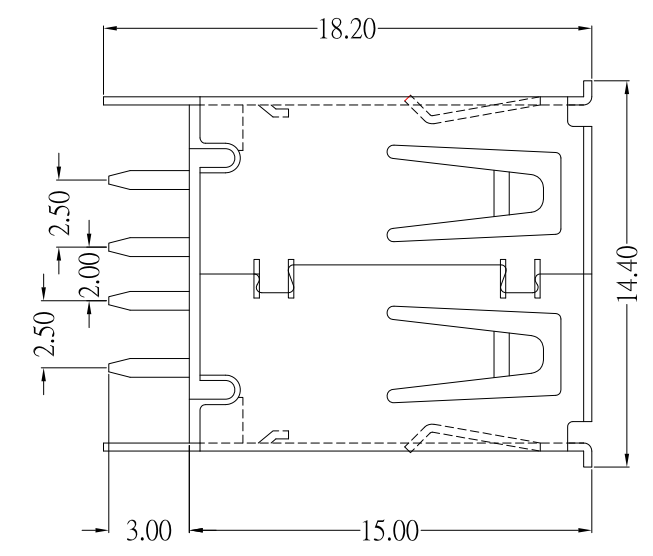

SUA-110V23Ax-x-S236

SHELL :	Color :
Blank : Brass	Black : B
I : SPCC	White : W

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MATL	TITLE	CONNECTOR
Jack Lu	12/15/21		MODLE	USB AF 直立式 插板彎腳有捲邊 L15.0mm 腳距 2.10mm
CHECKED BY:	DATE	SCALE	DWG NO.	SUA-110V23Ax-x-S236
Jacky Chen	12/15/21	1 : 1	PART NO.	SUA-110V23Ax-x-S236
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	12/15/21			

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新料號	Jack	121521