



SUA-210H-x-S175

Color
White : W
Black : B

NOTE:

1.MATERIAL:

a.HOUSING:PBT GLASS FIBRE UL94 V-0 ;

b.CONTACT: PHOSPHOR BRONZE ;

(SURFACE PLATING: Au + Sn + Ni)

c.SHEEL: SPCC ;

(SURFACE PLATING: Cu / Ni)





2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1,000 MEGA OHMS MIN

c.DIELECTNIC VOLTAGE: 500V AC ONE MIN LEVEL

d.OPERATING TEMPERATURE: -55°C~ 85°C

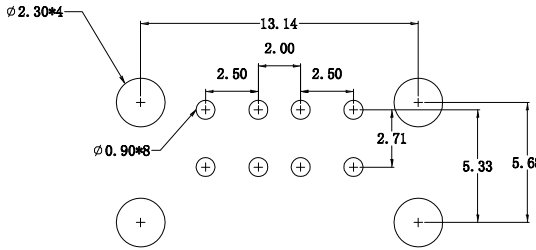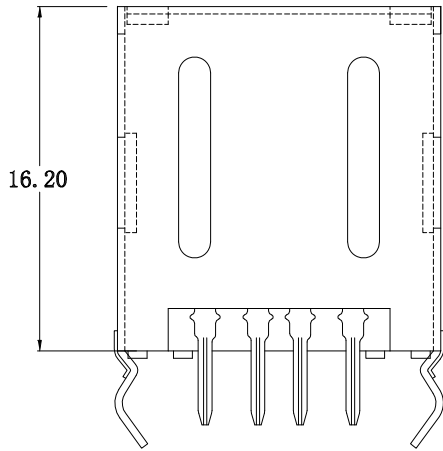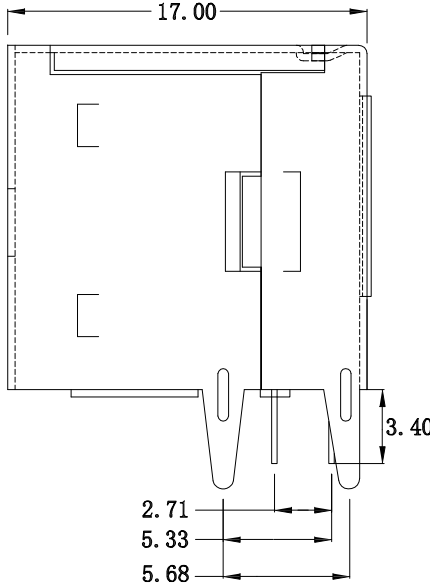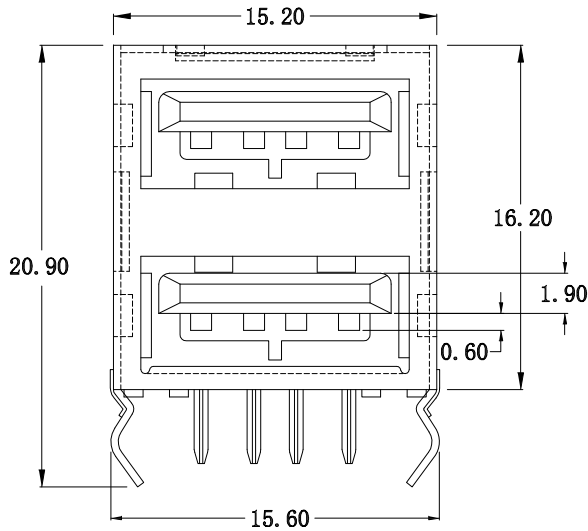

P.C.B LAYOUT MOUNTING PATTERN



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
10/11/12
DATE
10/11/12
DATE
10/11/12

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	USB AF 雙層全包
SCALE	1 : 1	DWG NO.	SUA-210H-x-S175
SHEET NO.	1 of 1	PART NO.	SUA-210H-x-S175

SIZE
A4
VER
R