

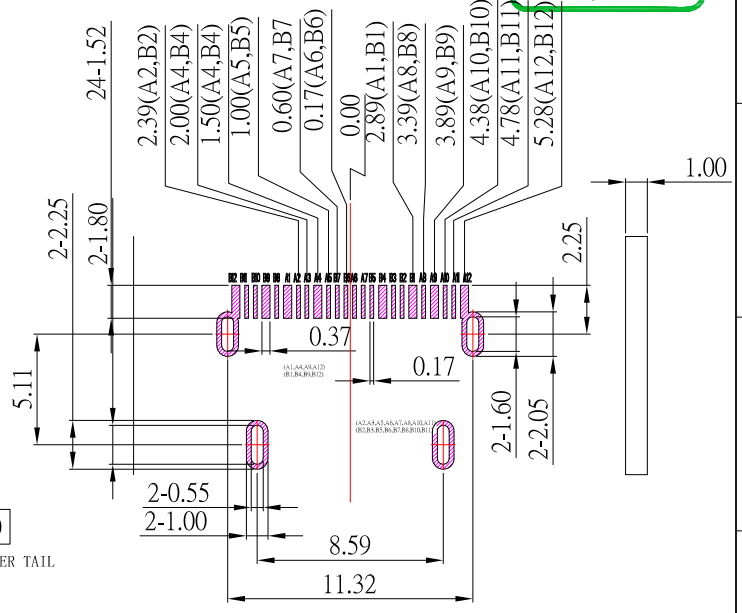
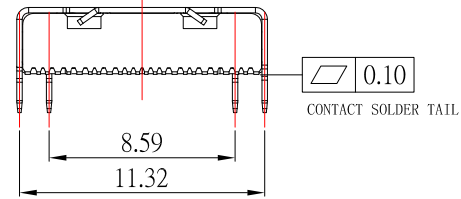
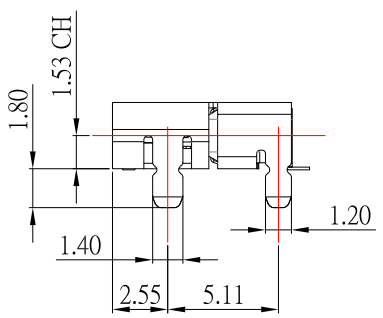
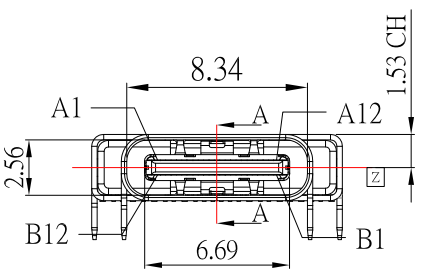


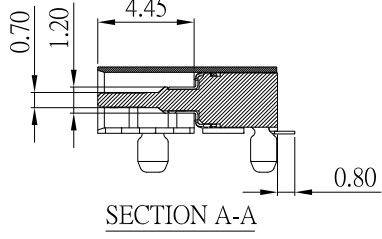


SBC-240S37-32x-S338

鍍層厚度:

Blank	: 1u"
2	: 15u"
3	: 30u"

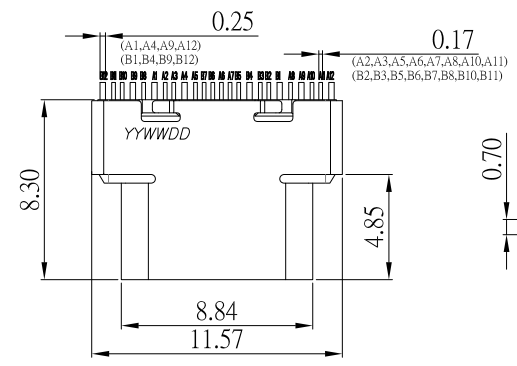

P.C.B LAYOUT MOUNTING PATTERN

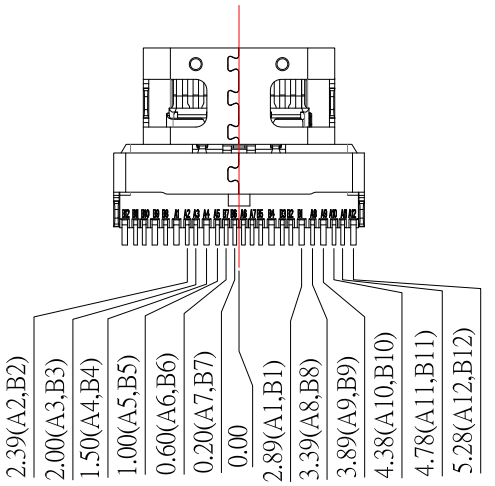

SPECIFICATIONS

- Electrical:
- Rating: 20V , 1.25A (A1,A4,A9,A12,B1,B4,B9,B12) ; 0.25A (OTHER PIN)
 - Contact Resistance: 40 mΩ Max
 - Insulation Resistance: 100 MΩ Min
 - Dielectric Withstanding Voltage: 100V AC
- Mechanical:
- Connector Mate and Unmate Force
 - Mate force: 5~20 N
 - Unmate force: 8~20 N


- Material:
- Housing: LCP
 - Contact: C7025
 - Shell: SUS
- Finish:
- Contact: Plated Gold in Mating Area ; Gold Plated on Solder Balls ; Nickel under plated overall
 - Shell: Nickel under Plated surface layer

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	03/07/23			
CHECKED BY:	DATE	FINISH	MODLE	USB3.1 TYPE CF 板上單排SMT L8.3 GEN 2,10G
Jacky Chen	03/07/23			
APPROVED BY:	DATE	SCALE	DWG NO.	SBC-240S37-32x-S338
Tony Kao	03/07/23	1 : 1		
		SHEET NO.	PART NO.	SBC-240S37-32x-S338
		1 of 1		
				SIZE A4
				VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE