SBC-240VS13-31x-S331

鍍層厚度 :

Blank : 1u"
2 : 15u"
3 : 30u"

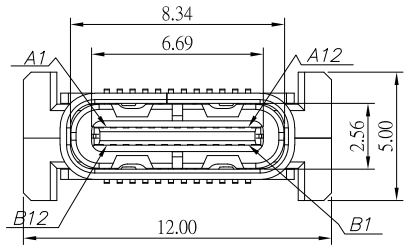

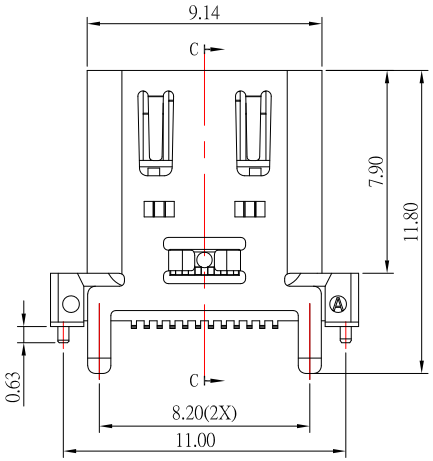

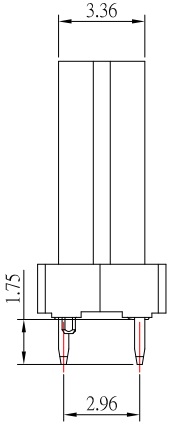

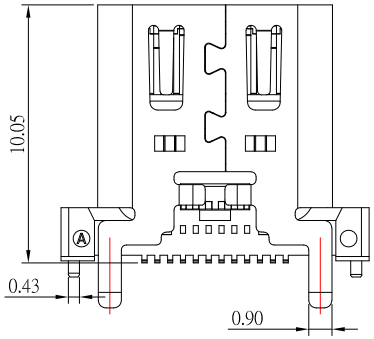

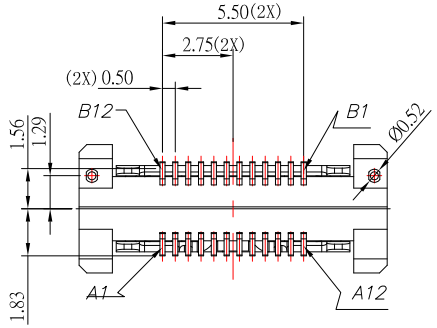

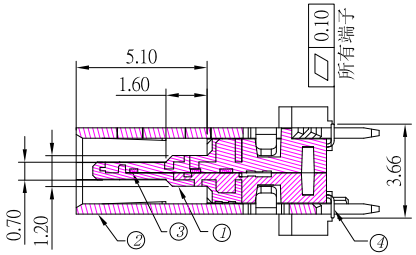

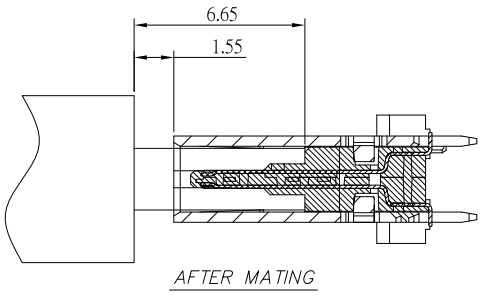

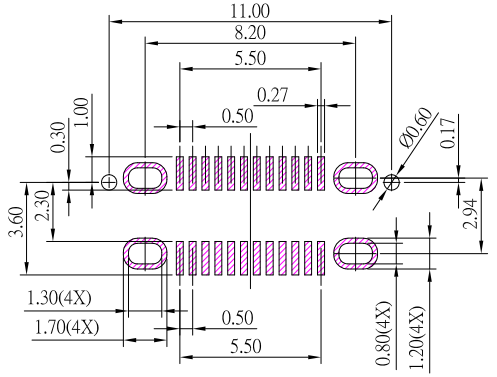

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS

Electrical:

1.Rating: 5.0V, 3.0 A

2.Dielectric Withstand Voltage: 100V AC

3.Contact Resistance: 40 mΩ Max

4.Insulation Resistance: 100 MΩ Min

Mechanical:

1.Connector Mate and Unmate Force

1.1 Mate force: 5~20 N

1.2 Unmate force: 8~20 N

Material:

1.Housing: PA9T

2.Contact: C18400

3.Shell: SUS

Finish:

1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall

2.Shell: Nickel under Plated surface layer

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新料號	Jack	070126
1	更新Contact材質	Jack	012224

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 07/01/26	MAT'L	
CHECKED BY: Jacky Chen	DATE 07/01/26	FINISH	
APPROVED BY: Tony Kao	DATE 07/01/26	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	CONNECTOR
MODLE	USB 3.1 TYPE C 直立式 SMT L10.05 mm 外殼腳長1.75
DWG NO.	SBC-240VS13-31x-S331
PART NO.	SBC-240VS13-31x-S331

SIZE A4 | VER R2