



SBC-241PL16-31x-S271

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

SPECIFICATIONS

Electrical:





- 1. Rating: 3.0A
- 2.Contact Resistance: 40 mΩ Max
- 3.Insulation Resistance: 100 MΩ Min
- 4.Dielectric Withstanding Voltage: 100V AC

Material:

- 1.Housing: LCP
- 2.Contact: C7025
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

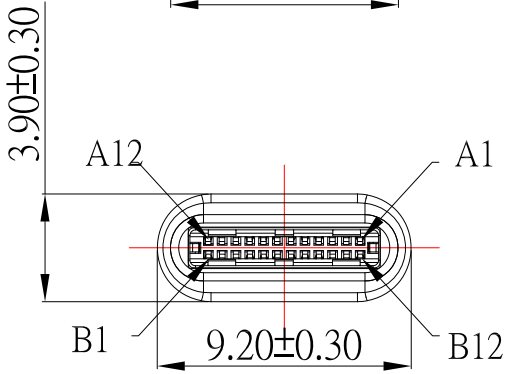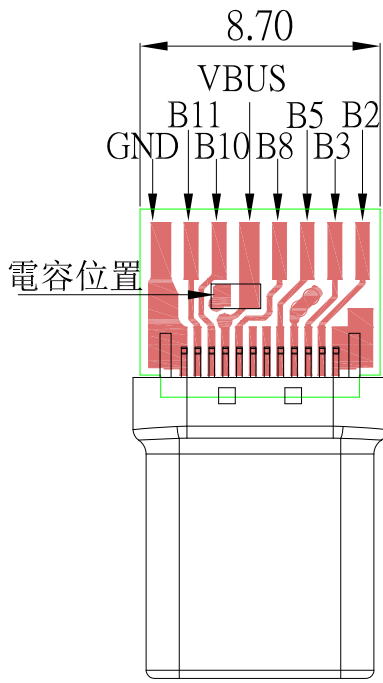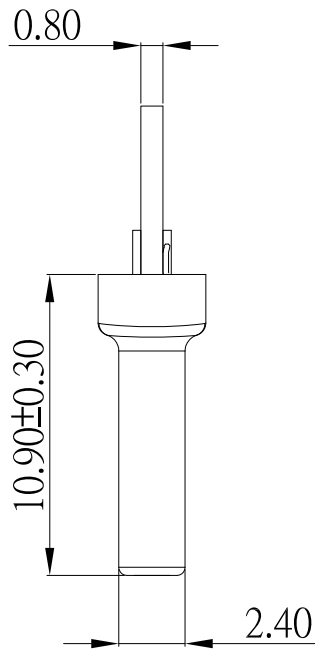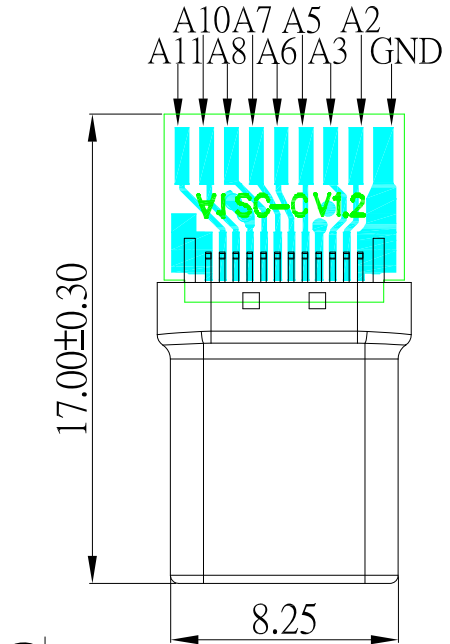

A4, B4, A9, B9	—— Vbus
B11	—— RX1+
B10	—— RX1-
B8	—— SBU2
B5	—— CC2
B3	—— TX2-
B2	—— TX2+
A11	—— RX2+
A10	—— RX2-
A8	—— SBU1
A7	—— D-
A6	—— D+
A5	—— CC1
A3	—— TX1-
A2	—— TX1+
A1, B1, A12, B12	—— GND

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MATL	TITLE	CONNECTOR
Jack Lu	11/23/22			
CHECKED BY:	DATE	FINISH	MODLE	USB 3.1 TYPE C 公頭拉伸帶板
Jacky Chen	11/23/22			帶帶電容10nF L 10.9
APPROVED BY:	DATE	SCALE	DWG NO.	SBC-241PL16-31x-S271
Tony Kao	11/23/22	1 : 1	PART NO.	SBC-241PL16-31x-S271
		SHEET NO.	1 of 1	

1	更新圖面	Jack	112322
ITEM NO.	DESCRIPTION	DRAWN	DATE