



SBC-241PL9-31x-S271

鍍層厚度：
Blank : 1u"
2 : 15u"
3 : 30u"

SPECIFICATIONS

Electrical:






- Rating: 3.0A
- Contact Resistance: 40 mΩ Max
- Insulation Resistance: 100 MΩ Min
- Dielectric Withstanding Voltage: 100V AC

Material:

- Housing: LCP
- Contact: C7025
- Shell: SUS

Finish:

- Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- Shell: Nickel under Plated surface layer

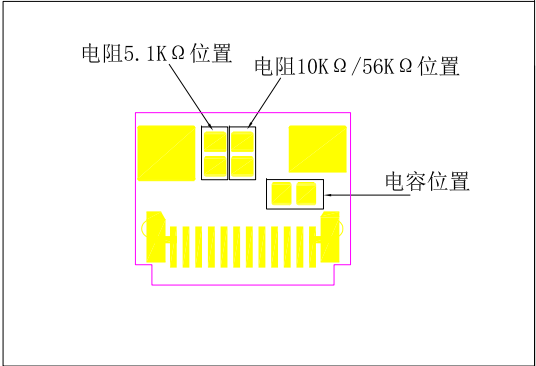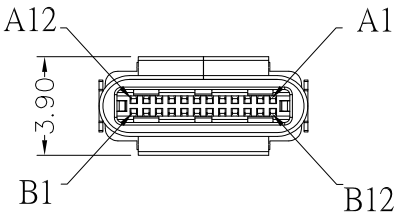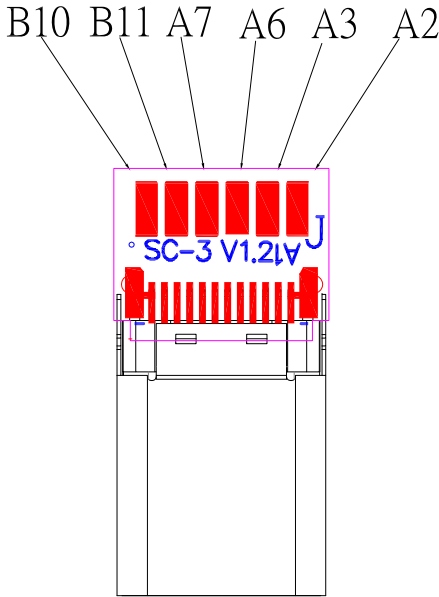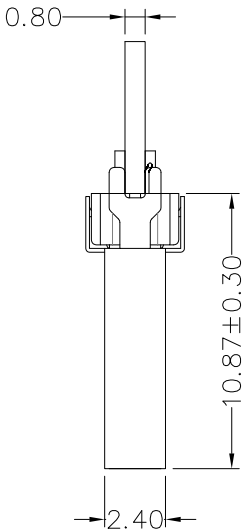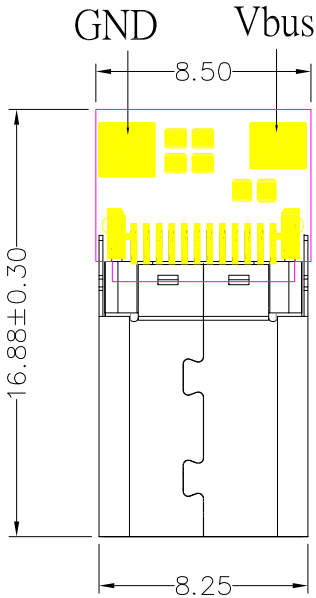

- A1, B1, A12, B12 — GND
A4, B4, A9, B9 — Vbus
A5 —
A2 — TX1+
A3 — TX1-
A6 — D+
A7 — D-
B10 — RX1-
B11 — RX1+

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MATL	TITLE	CONNECTOR
Jack Lu	11/13/23			
CHECKED BY:	DATE	FINISH	MODLE	USB 3.1 TYPE C 公頭 铆合帶板
Jacky Chen	11/13/23			帶電阻5.1K L10.87
APPROVED BY:	DATE	SCALE	DWG NO.	SBC-241PL9-31x-S271
Tony Kao	11/13/23	1 : 1	PART NO.	SBC-241PL9-31x-S271
		SHEET NO.	1 of 1	

2	更新圖面	Jack	111323
1	更新MODLE	Jack	122517
ITEM NO.	DESCRIPTION	DRAWN	DATE