



SBC-241PLM3-31x-S338

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

SPECIFICATIONS

Electrical:

- Rating: 5.0A(for VBUS),0.25A(for other)
- Contact Resistance: 40 mΩ Max
- Insulation Resistance: 100 MΩ Min
- Dielectric Withstanding Voltage: 100V AC

Mechanical:

- Connector Mate and Unmate Force
 - Mate force: 5~20 N
 - Unmate force: 8~20 N







Material:

- Housing: LCP,UL 94V-0
- Contact: C7025

3.Shell: SUS

Finish:

- Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- Shell: Nickel under Plated surface layer

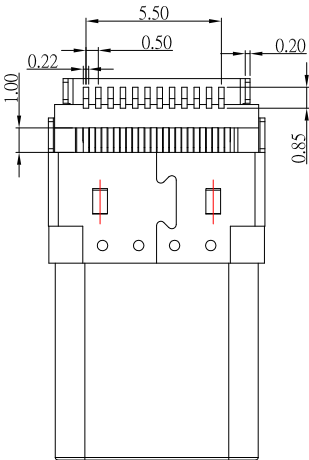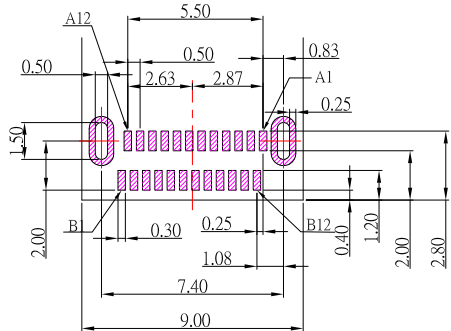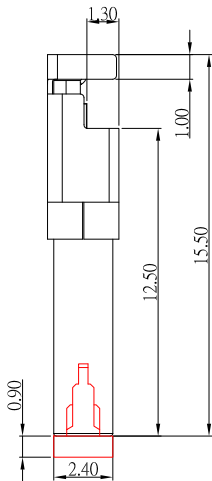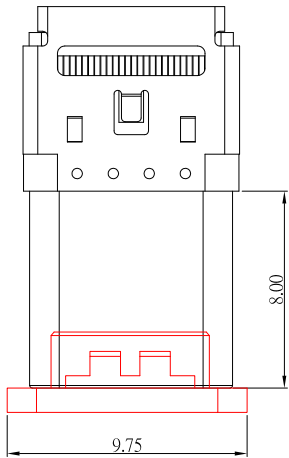

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTxp1	Positive half of first SuperSpeed TX differential pair	B11	SSRxp1	Positive half of first SuperSpeed RX differential pair
A3	SSTxm1	Negative half of first SuperSpeed TX differential pair	B10	SSRxm1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SRb2	Sideband Use (SRb)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dm2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SRb1	Sideband Use (SRb)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRxq2	Negative half of second SuperSpeed RX differential pair	B3	SSTxq2	Positive half of second SuperSpeed TX differential pair
A11	SSRxq2	Positive half of second SuperSpeed RX differential pair	B2	SSTxq2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

P.C.B LAYOUT MOUNTING PATTERN

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	11/24/22	FINISH	MODLE	TYPE C Male SMT 沉板 ,板上H:1.6mm
CHECKED BY:	DATE	SCALE	DWG NO.	SBC-241PLM3-31x-S338
Jacky Chen	11/24/22	1 : 1	PART NO.	SBC-241PLM3-31x-S338
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	11/24/22			