

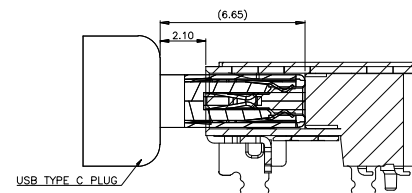

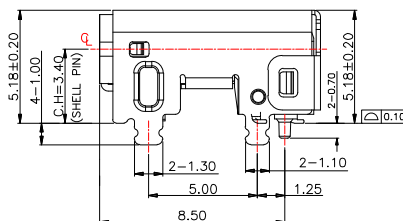
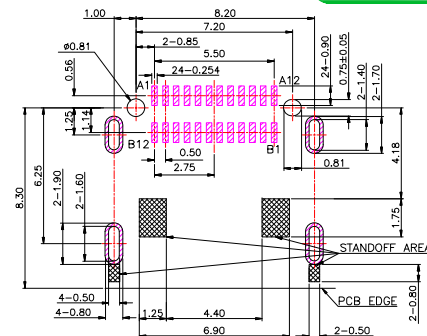


3 : 30u"

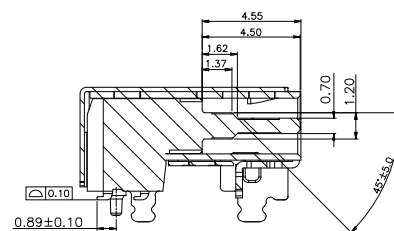

A12	GND	B1	GND
A11	SSRxp2	B2	SSTXp2
A10	SSRXn2	B3	SSTXn2
A9	VBUS	B4	VBUS
A8	SBU1	B5	CC2
A7	Dn1	B6	Dp2
A6	Dp1	B7	Dn2
A5	CC1	B8	SBU2
A4	VBUS	B9	VBUS
A3	SSTXn1	B10	SSRXn1
A2	SSTXp1	B11	SSRXp1
A1	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Above 50	± 0.3				

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	04/14/25					
CHECKED BY:	DATE	FINISH		MODLE	USB 4.0 TYPE C 母座板上: L10.15 板上墊高 CL 3.4mm 外殼腳距5.0 外殼腳長1.00 GEN 2X2 20G	
Jacky Chen	04/14/25					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	SBC-240S50-43x-S461	SIZE A4
Tony Kao	04/14/25	SHEET NO.	1 of 1	PART NO.	SBC-240S50-43x-S461	VER R