
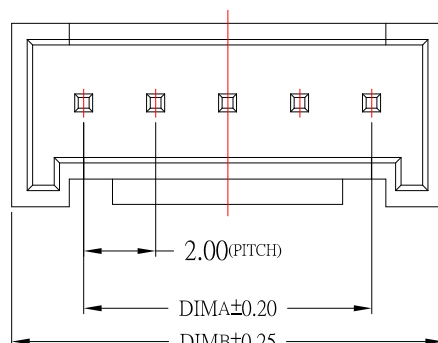


SECTION A-A

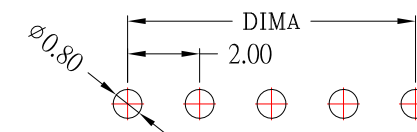

PCB LAYOUT

CKT	A	B	CKT	A	B
2	2.0	6.0	12	22.0	26.0
3	4.0	8.0	13	24.0	28.0
4	6.0	10.0	14	26.0	30.0
5	8.0	12.0	15	28.0	32.0
6	10.0	14.0	16	30.0	34.0
7	12.0	16.0	17	32.0	36.0
8	14.0	18.0	18	34.0	38.0
9	16.0	20.0	19	36.0	40.0
10	18.0	22.0	20	38.0	42.0
11	20.0	24.0			

SPECIFICATIONS

Current rating : 2.0A AC , DC

Voltage rating : 200V AC

Temperature rating : -25°C ~ +85°C

Insulation resistance : 1000MΩ min.



Withstand voltage : 500V AC/minute

Contact resistance : 25mΩ/Max

Material:

Housing : PA66

Contact : Brass / Tin plated over Nickel

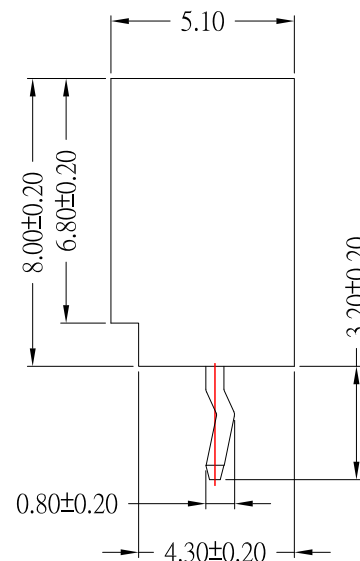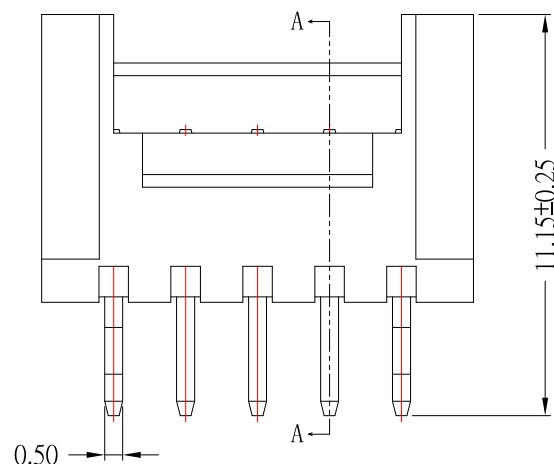

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 03/08/24
DATE: 03/08/24
DATE: 03/08/24

MATL	TITLE	CONNECTOR
FINISH	MODLE	WAFER 2.0 DIP 180度 帶扣 K腳
SCALE	DWG NO.	WF-2004VDKxx-S304
SHEET NO.	PART NO.	WF-2004VDKxx-S304

SIZE
A4
VER
R

ITEM NO.	DESCRIPTION	DRAWN	DATE