
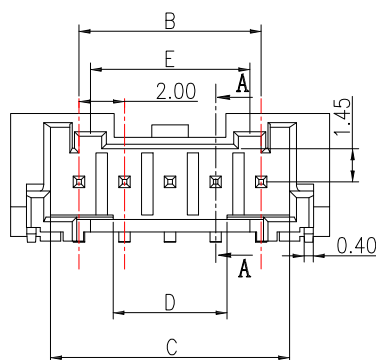
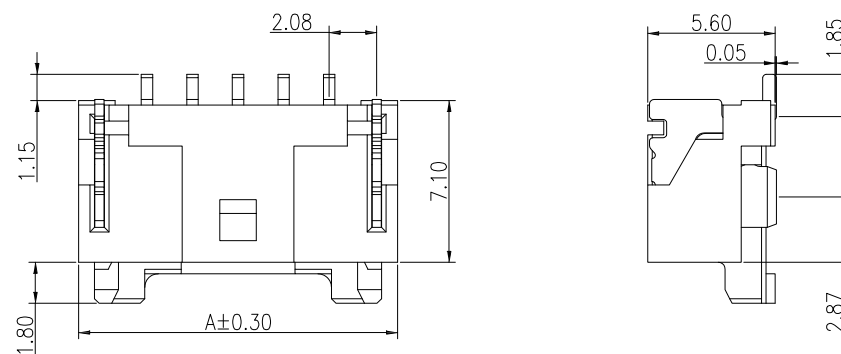
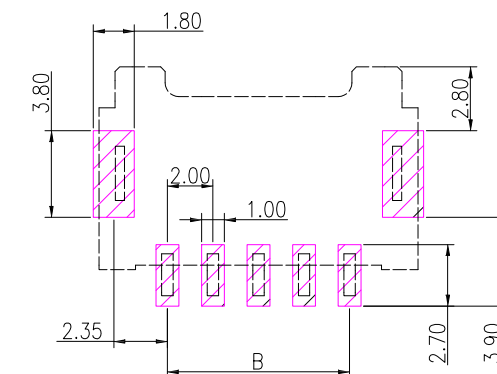


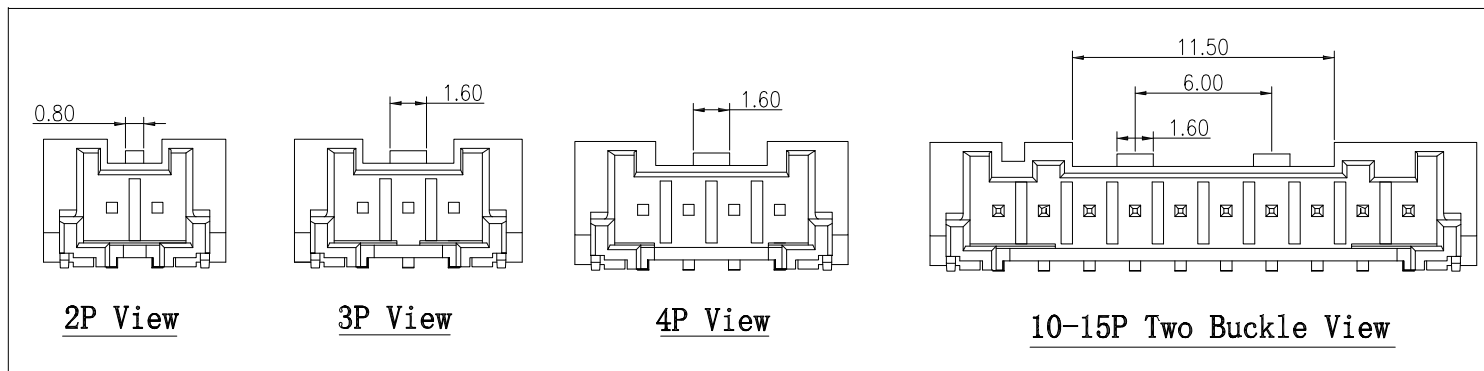

15	34.00	28.00	30.50	23.00	13.60
14	32.00	26.00	28.50	21.00	13.60
13	30.00	24.00	26.50	19.00	13.60
12	28.00	22.00	24.50	17.00	13.60
11	26.00	20.00	22.50	15.00	13.60
10	24.00	18.00	20.50	13.00	13.60
09	22.00	16.00	18.50	11.00	7.00
08	20.00	14.00	16.50	9.00	7.00
07	18.00	12.00	14.50	7.00	7.00
06	16.00	10.00	12.50	5.00	7.00
05	14.00	8.00	10.50	5.00	7.00
04	12.00	6.00	8.50	5.00	—
03	10.00	4.00	6.50	1.00	—
02	8.00	2.00	4.50	—	—
PIN	A	B	C	D	E

SPECIFICATIONS

- 1.Current rating : 3.0A AC , DC
- 2.Voltage rating : 250V AC , DC
- 3.Temperature rating : -40°C ~ +105°C
- 4.Insulation resistance : 1000 MΩ min.
- 5.Withstand voltage : 800V AC/minute
- 6.Contact resistance : 20 mΩ/Max

Material:

- 1.Housing : PA9T
- 2.Pin : Brass,Tin Plated over Nickel

				DRAWN BY: Jack Lu			DATE: 04/09/25	MAT'L		TITLE	CONNECTOR
				CHECKED BY: Jacky Chen			DATE: 04/09/25	FINISH		MODLE	WAFER 2.0 SMT 90度
				APPROVED BY: Tony Kao			DATE: 04/09/25	SCALE	1 : 1	DWG NO.	WF-2014ARSxx-S208
								SHEET NO.	1 of 1	PART NO.	WF-2014ARSxx-S208
											SIZE: A4
											VER: R1

1 更新料號 Jack 042925

ITEM NO. DESCRIPTION DRAWN DATE

CONTACT 建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM