

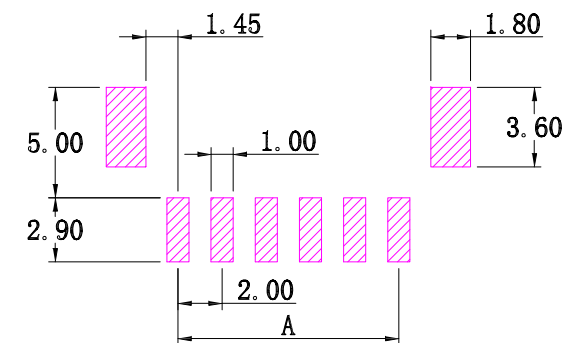
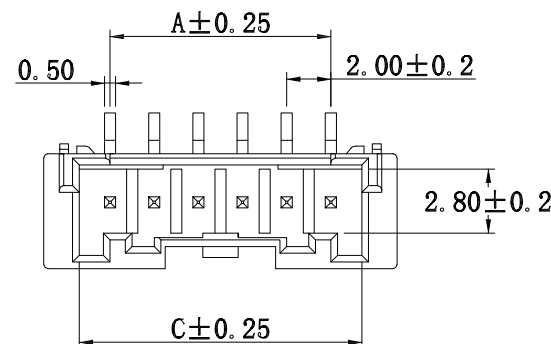
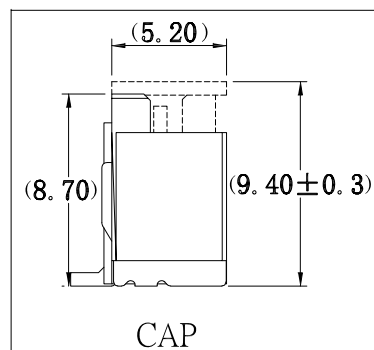
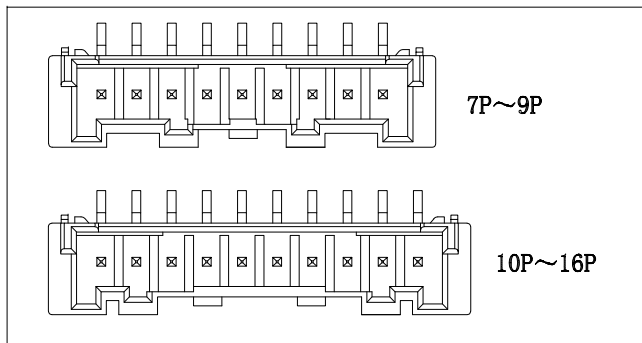


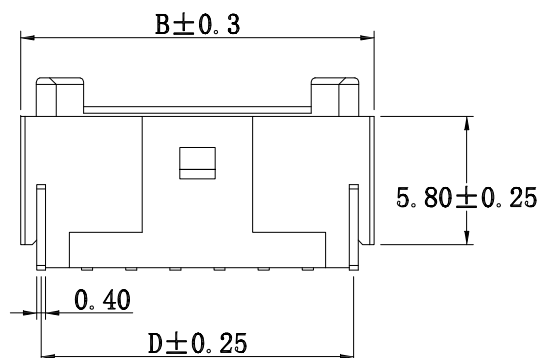

P.C.B LAYOUT

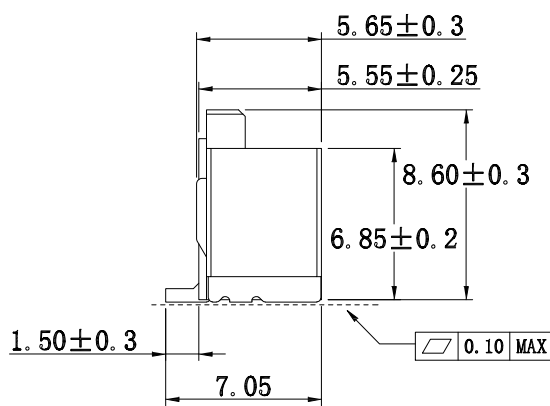

PART NO.	A-(mm)	B-(mm)	C-(mm)	D-(mm)
02	2.00mm	8.0mm	4.60mm	6.20mm
03	4.00mm	10.0mm	6.60mm	8.20mm
04	6.00mm	12.0mm	8.60mm	10.20mm
05	8.00mm	14.0mm	10.60mm	12.20mm
06	10.0mm	16.0mm	12.60mm	14.20mm
07	12.0mm	18.0mm	14.60mm	16.20mm
08	14.0mm	20.0mm	16.60mm	18.20mm
09	16.0mm	22.0mm	18.60mm	20.20mm
10	18.0mm	24.0mm	20.60mm	22.20mm
11	20.0mm	26.0mm	22.60mm	24.20mm
12	22.0mm	28.0mm	24.60mm	26.20mm
13	24.0mm	30.0mm	26.60mm	28.20mm
14	26.0mm	32.0mm	28.60mm	30.20mm
15	28.0mm	34.0mm	30.60mm	32.20mm
16	30.0mm	36.0mm	32.60mm	34.20mm

SPECIFICATIONS

- 1.Current rating : 3.0A AC , DC
- 2.Voltage rating : 250V AC , DC

MATERIAL:

- 1.Housing : PA6T,Natural
- 2.Pin : Brass,Tin Plated over Nickel
- 3.Solder Tabs : Brass,Tin Plated over Nickel

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3 3RD. ANGEL'S  UNITS MM	DRAWN BY: DATE Jack Lu 12/19/25		MAT'L		TITLE	CONNECTOR	
			CHECKED BY: DATE Jacky Chen 12/19/25		FINISH					MODLE	WAFER 2.0 SMT 180度
					APPROVED BY: DATE Tony Kao 12/19/25		SCALE	1 : 1	DWG NO.	WF-2014CVSxxC-S246	SIZE A4
ITEM NO.	DESCRIPTION	DRAWN	DATE				SHEET NO.	1 of 1	PART NO.	WF-2014CVSxxC-S246	VER R