
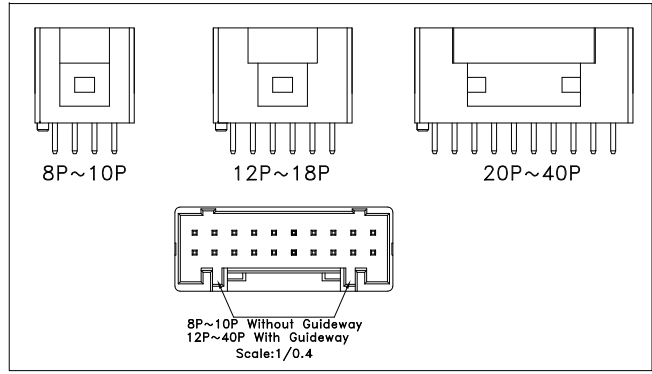
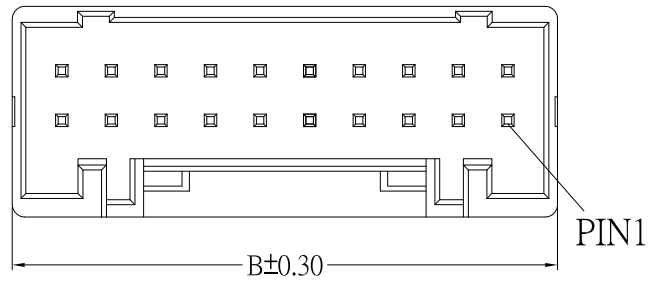
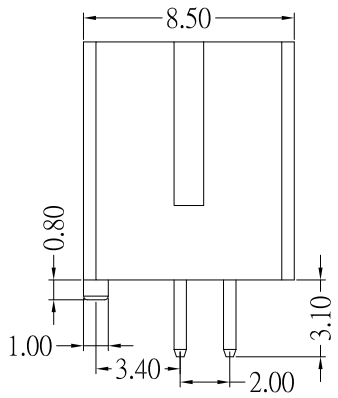


P.C.B LAYOUT

WF-2018VD2E_{xx}-S304
Double Row ——— Total PINs

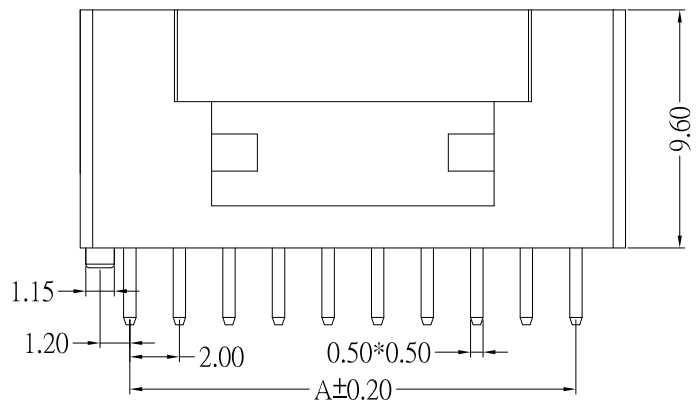

PART NO.	Dimension mm	
	A	B
08	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00
36	34.00	38.00
38	36.00	40.00
40	38.00	42.00

SPECIFICATIONS

- 1.Current rating : 3.0A AC , DC
- 2.Voltage rating : 250V AC , DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 1000 MΩ min.
- 5.Withstand voltage : 800V AC/minute
- 6.Contact resistance : 10 mΩ/Max

Material:

- 1.Housing : PA66
- 2.Pin : Brass / Tin-plated

2

新增PIN1標示

Jack

102825

1

更新料號

Jack

102725

ITEM NO.

DESCRIPTION

DRAWN

DATE

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY: Jack Lu

CHECKED BY: Jacky Chen

APPROVED BY: Tony Kao

DATE 10/28/25

DATE 10/28/25

DATE 10/28/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

WAFER 2.0 DIP 180度 帶定位柱

WF-2018VD2E_{xx}-S304

WF-2018VD2E_{xx}-S304

SIZE A4

VER R2