

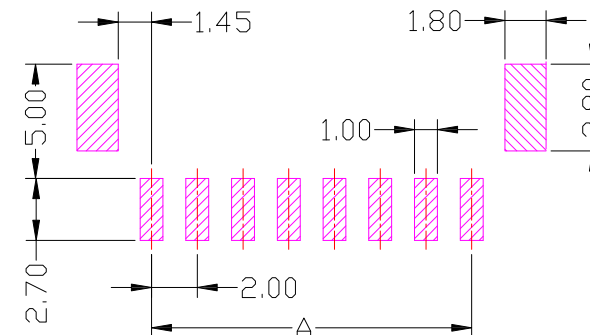



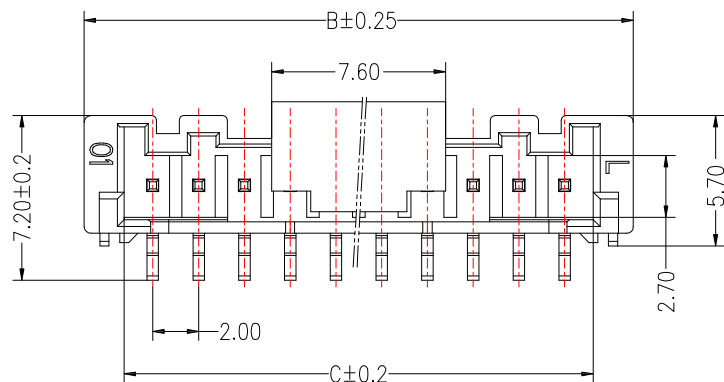

P.C.B LAYOUT MOUNTING PATTERN

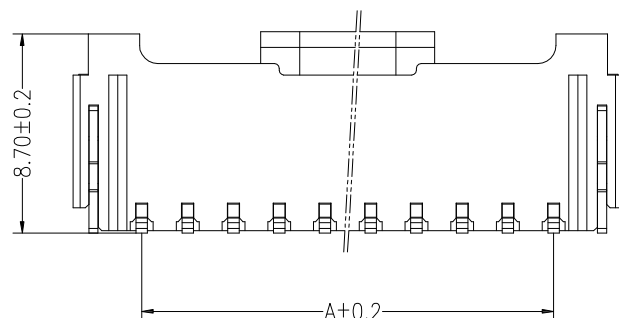

PIN.	DIMA	DIMB	DIMC
02	2.00	8.00	4.55
03	4.00	10.00	6.55
04	6.00	12.00	8.55
05	8.00	14.00	10.55
06	10.00	16.00	12.55
07	12.00	18.00	14.55
08	14.00	20.00	16.55
09	16.00	22.00	18.55
10	18.00	24.00	20.55
11	20.00	26.00	22.55
12	22.00	28.00	24.55
13	24.00	30.00	26.55
14	26.00	32.00	28.55
15	28.00	34.00	30.55

SPECIFICATIONS

Current rating : 3.0A AC , DC

Voltage rating : 250V AC , DC

Temperature rating : -25°C ~ +85°C

Insulation resistance : 1,000MΩ min.

Withstand voltage : 800V AC/minute

Contact resistance : 20mΩ/Max

Material:

Housing : PA6T

PIN : Brass / Tin-Plated

SOLDER TABS : Brass / Tin-Plated



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
09/08/20
DATE
09/08/20
DATE
09/08/20

MATL	TITLE	CONNECTOR
FINISH	MODLE	WAFER P : 2.0mm SMT 180度
SCALE	DWG NO.	WF-2019VSxx-S304
SHEET NO.	PART NO.	WF-2019VSxx-S304

SIZE
A4
VER
R