




Blank : 1u"
2 : 15u"
3 : 30u"

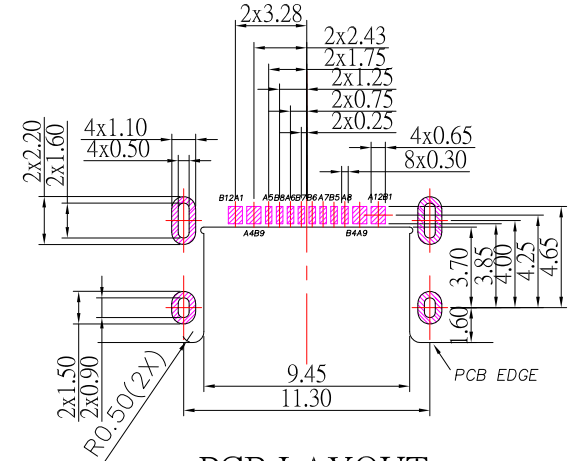

2.Shell: Nickel under Plated surface layer

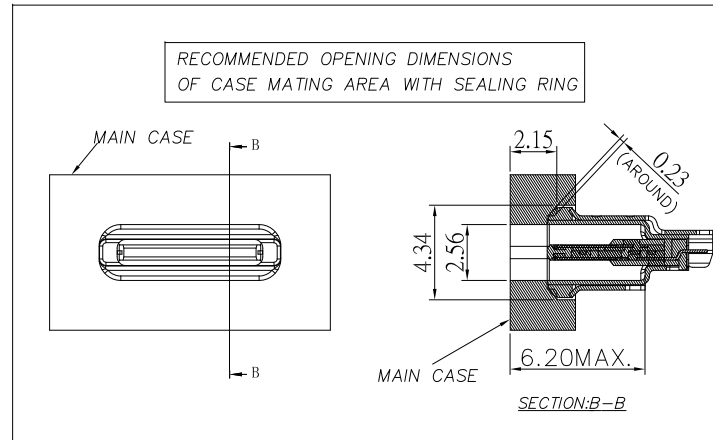

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A12	GND	B1	GND

 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP					
TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle $\pm 0.3^\circ$	3RD. ANGEL'S		UNITS MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	10/16/24					
CHECKED BY:	DATE	FINISH		MODLE	USB TYPE C 2.0 沉板 CH 0.0mm 防水型IPX7	
Jacky Chen	10/16/24					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	SBC-WP160M6-20x-S332	SIZE
						A4
Tony Kao	10/16/24	SHEET NO.	1 of 1	PART NO.	SBC-WP160M6-20x-S332	VER
						R