



P.C.B LAYOUT MOUNTING PATTERN



CIRCUIT DIAGRAM

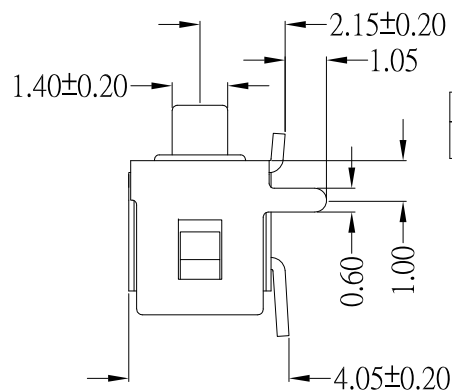

TS-A01VSx-xx-S428

MODEL NO.	TS-A01VS	TS-A01VSA	TS-A01VSQ	TS-A01VSB	TS-A01VSC
H (mm)	4.30	5.00	6.00	7.00	8.00

Knob Color :
B: Black

Operating Force

SPECIFICATIONS

Rating	DC 12V 50mA Max.	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.10mm	
Operating Force	2 180±50gf	3 250±50gf
Operating Life (cycles)	50,000	30,000

E	TERMINAL	2	BRASS	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	BRASS	Tin plated
B	BASE	1	PPA (Black)	
A	STEM	1	PPA (Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

4	更新圖面	Jack	112621
3	更新尺寸標示位置	Jack	111621
2	更新尺寸	Jack	110321
1	更新高度選項	Jack	102921
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE
Jack Lu	11/26/21
CHECKED BY:	DATE
Jacky Chen	11/26/21
APPROVED BY:	DATE
Tony Kao	11/26/21

MAT'L	TITLE	SWITCH
FINISH	MODLE	TACT SWITCH
SCALE	1 : 1	DWG NO. TS-A01VSx-xx-S428
SHEET NO.	1 of 1	PART NO. TS-A01VSx-xx-S428
		SIZE A4
		VER R4