
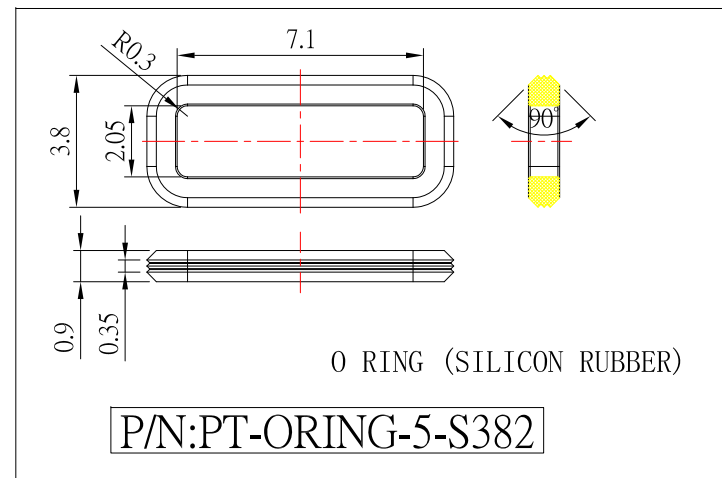
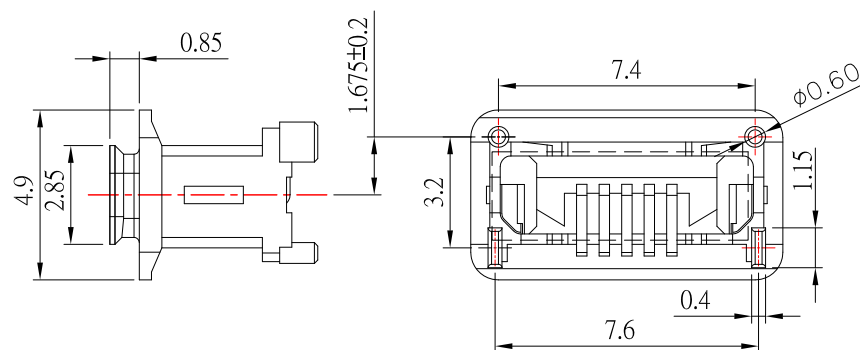
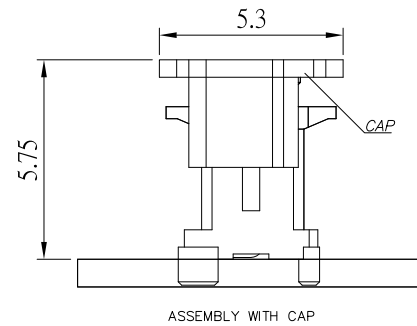
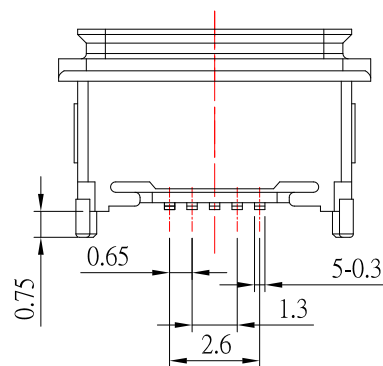
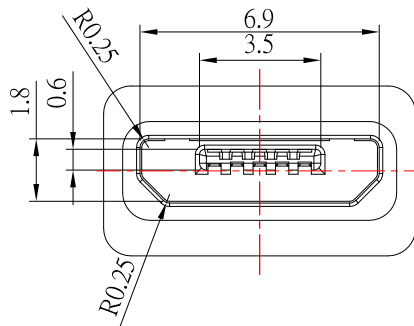


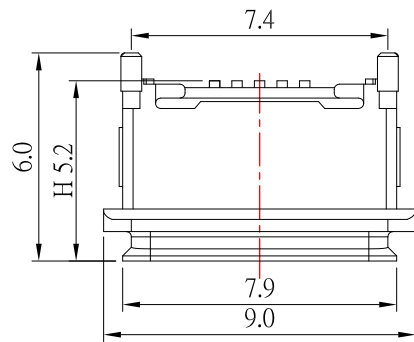

O RING (SILICON RUBBER)


P/N:PT-ORING-5-S382

MRUSB-5B-WP9VA-x-S382

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

IPX7

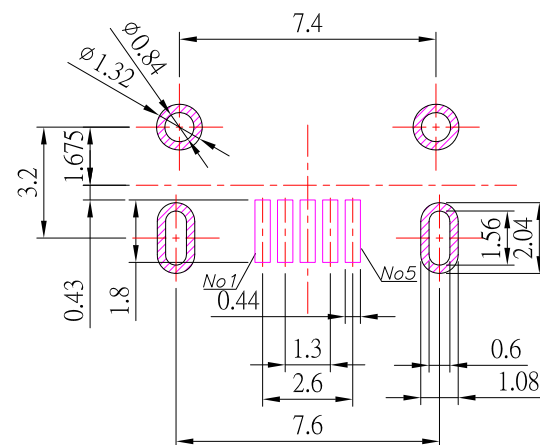

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

- 1.1 HOUSING: HIGH-TEMP
- 1.2 CONTACT: COPPER ALLOY
- 1.3 SHELL: SUS

FINISH:

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER
- 3.SPECIFICATION:
 - 3.1 RATING: 1.8 A(PIN1,5) ; 1.0A (PIN2,3,4) , 30VAC
 - 3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 VAC
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 1000 MΩ MIN.

9	更新料號	Jack	102720
8	更新樣式及尺寸	Jack	092820
7	更新圖面	Jack	111119
6	更新Rating	Jack	042319
5	新增ORING料號	Jack	032819
4	更新樣式	Jack	121218
3	更新PCB LAYOUT尺寸	Jack	061318
2	更新尺寸	Jack	061218
1	更新圖面	Jack	052318
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.


TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	---------------------------------------	-----------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	10/27/20			
CHECKED BY:	DATE	FINISH	MODLE	MICRO USB 5PF B TYPE 直立式 防水型 IPX7 (外殼腳1.15 X 0.4 X 0.75)
Jacky Chen	10/27/20			
APPROVED BY:	DATE	SCALE	DWG NO.	MRUSB-5B-WP9VA-x-S382
Tony Kao	10/27/20	1 : 1	PART NO.	MRUSB-5B-WP9VA-x-S382
		SHEET NO.	1 of 2	

IPX7





機殼面板對密封圈
與縮量0.40Min


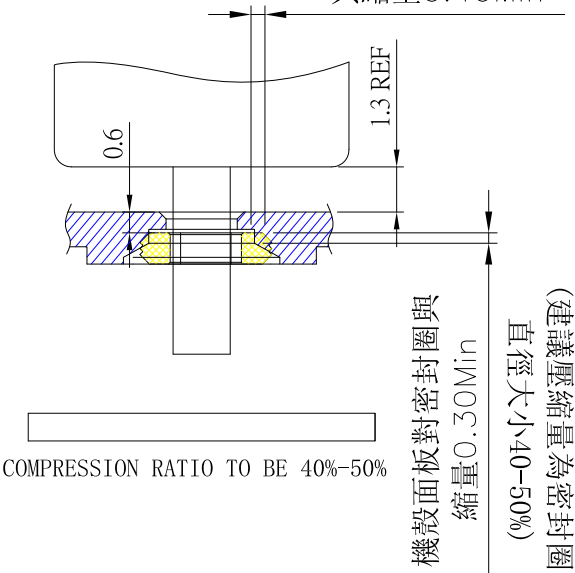


COMPRESSION RATIO TO BE 40%-50%

(建議壓縮量為密封圈
直徑大小40-50%)
縮量0.30Min

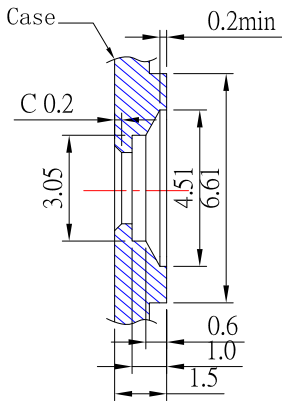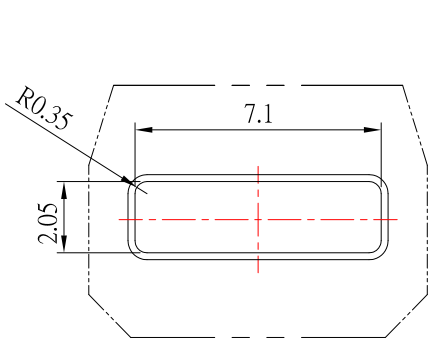

RECOMMENDED OPEN DIMENSION OF CASE

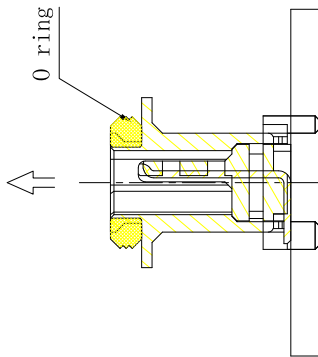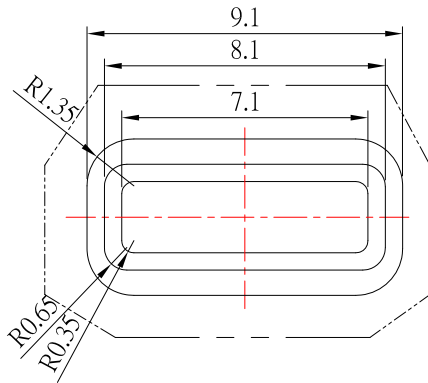

9	更新料號	Jack	102720
8	更新樣式及尺寸	Jack	092820
7	更新圖面	Jack	111119
6	更新Rating	Jack	042319
5	新增ORING料號	Jack	032819
4	更新樣式	Jack	121218
3	更新PCB LAYOUT尺寸	Jack	061318
2	更新尺寸	Jack	061218
1	更新圖面	Jack	052318
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

10/27/20

CHECKED BY:

Jacky Chen

DATE

10/27/20

APPROVED BY:

Tony Kao

DATE

10/27/20

MAT'L

FINISH

SCALE

1 : 1

TITLE

CONNECTOR

MODLE

MICRO USB 5PF B TYPE 直立式

DWG NO.

MRUSB-5B-WP9V-x-S382

PART NO.

MRUSB-5B-WP9V-x-S382

SIZE

A4

VER

R9

SIZE

A4

VER

R9