




|           |        |
|-----------|--------|
| Model No. | X (mm) |
| Blank     | 2.0    |
| A         | 4.0    |

Black : B



White : W



### CIRCUIT DIAGRAM

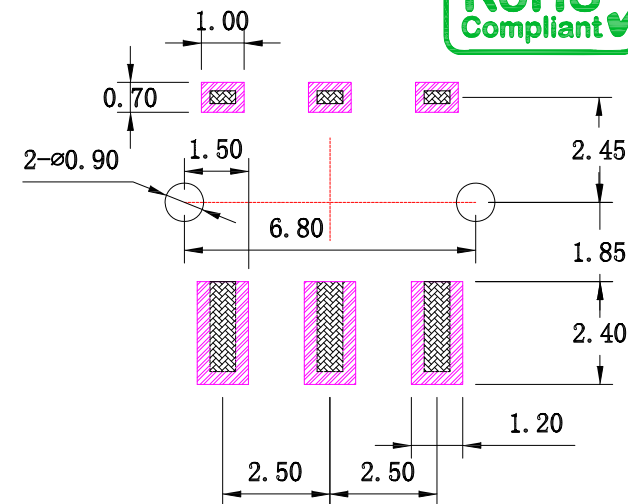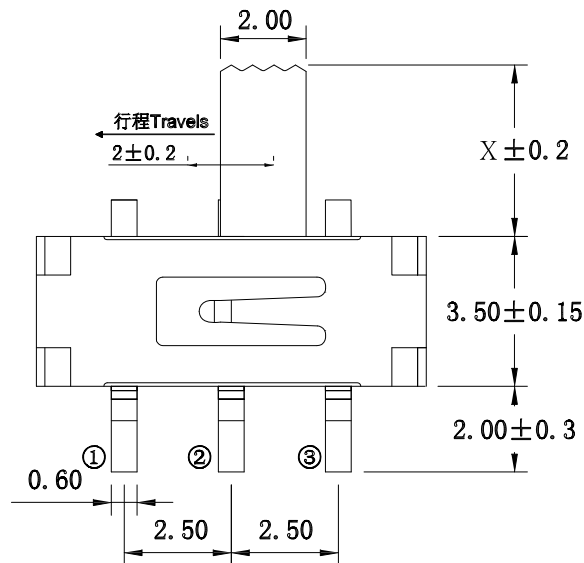

P.C.B LAND PATTERN

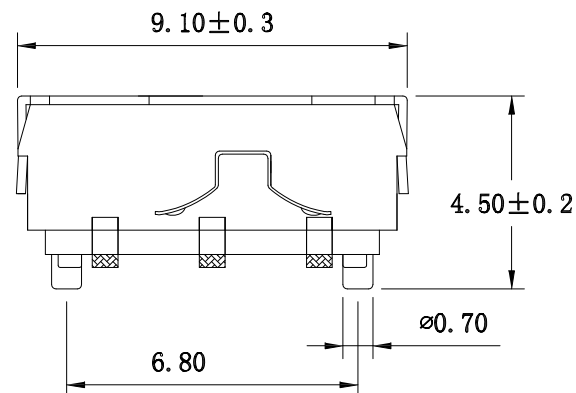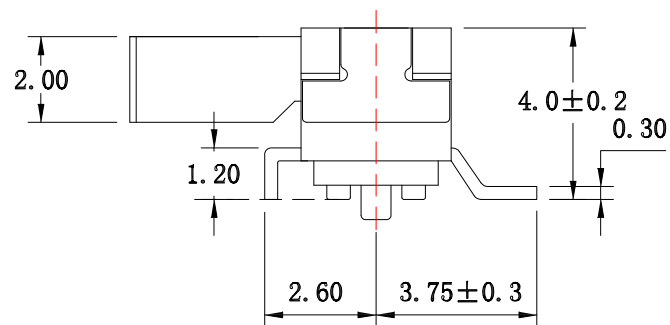

## SPECIFICATIONS

|                                 |                    |
|---------------------------------|--------------------|
| Rating                          | 100mA , 12V DC     |
| Insulation Resistance           | 50M $\Omega$ Min.  |
| Dielectric Withstanding Voltage | AC 250 V(50Hz)1m   |
| Contact Resistance              | 100m $\Omega$ Max. |
| Operating Force                 | 200 $\pm$ 50gf     |
| Operating Life                  | 10,000 cycles      |

|     |             |     |                 |           |
|-----|-------------|-----|-----------------|-----------|
| E   | TERMINAL    | 6   | PHOSPHOR BRONZE | Ag plated |
| D   | CLIP        | 2   | PHOSPHOR BRONZE | Ag plated |
| C   | COVER       | 1   | SUS             |           |
| B   | BASE        | 1   | PA6T            | Black     |
| A   | SLIDER      | 1   | PA46            | Black     |
| NO. | DESCRIPTION | QTY | MATERIAL        | PLATING   |

|   |           |        |          |                        |            |
|---|-----------|--------|----------|------------------------|------------|
| 3 | MAT'L     |        | TITLE    | SWITCH                 |            |
|   | FINISH    |        | MODLE    | SMT SLIDE SWICTH 撥柄鋸齒狀 |            |
| 3 | SCALE     | 1 : 1  | DWG NO.  | SS-B80x1-x-S246        | SIZE<br>A4 |
| 3 | SHEET NO. | 1 of 1 | PART NO. | SS-B80x1-x-S246        | VER<br>R6  |

|          |             |       |        |
|----------|-------------|-------|--------|
| 6        | 更新圖面        | Jack  | 060923 |
| 5        | 更新材質        | Jack  | 011623 |
| 4        | 新增柄長選項      | Jack  | 112522 |
| 3        | 更新圖面        | Jack  | 092319 |
| 2        | 更新圖面        | Jack  | 122618 |
| 1        | 新增尺寸        | Jack  | 112217 |
| ITEM NO. | DESCRIPTION | DRAWN | DATE   |

# CONTACT

建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

|                                        |               |       |
|----------------------------------------|---------------|-------|
| TOLERANCE UNLESS<br>OTHERWISE STATED : | Up to 5       | ± 0.2 |
|                                        | Above 5 ~ 15  | ± 0.3 |
|                                        | Above 15 ~ 30 | ± 0.4 |
|                                        | Above 30 ~ 50 | ± 0.5 |
|                                        | Angle         | ± 0.3 |

3RD.  
ANGEL'S



UNITS

MM

|           |          |
|-----------|----------|
| DRAWN BY: | DATE     |
| Jack Lu   | 06/09/23 |

|             |          |
|-------------|----------|
| CHECKED BY: | DATE     |
| Jacky Chen  | 06/09/23 |

|              |          |
|--------------|----------|
| APPROVED BY: | DATE     |
| Tony Kao     | 06/09/23 |