

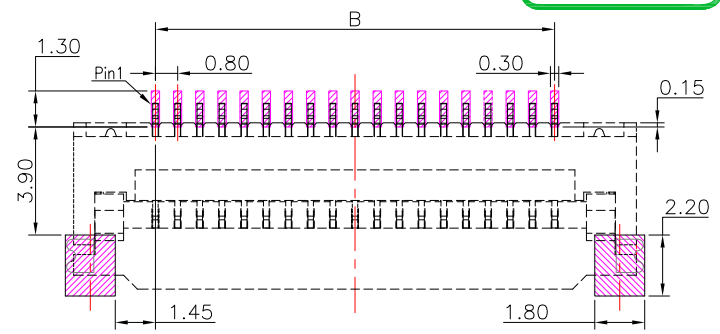



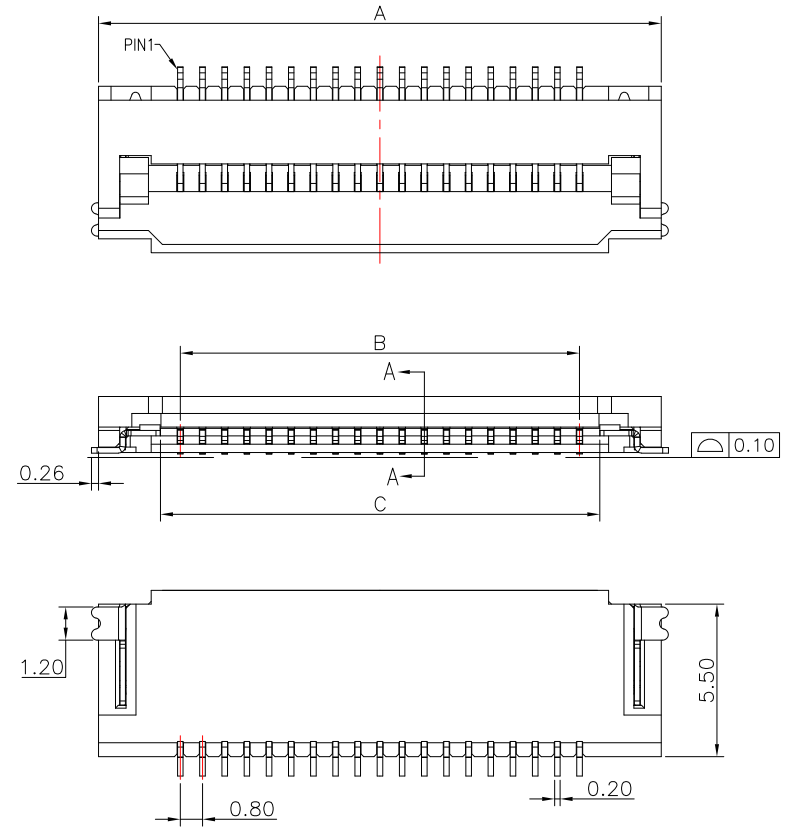

PCB LAYOUT

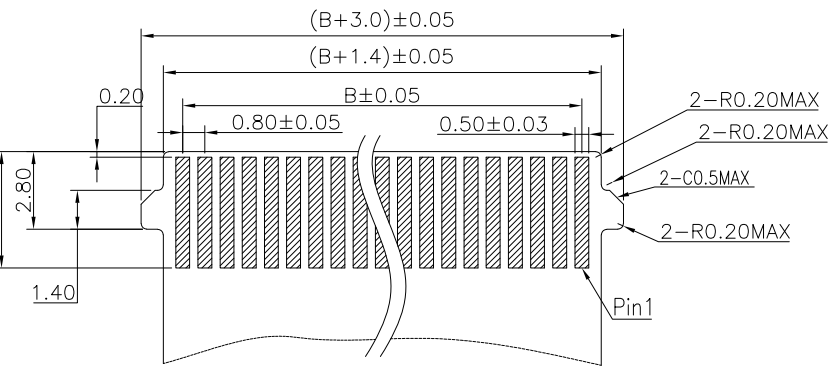

Recommended FPC/FFC
Thickness=0.3±0.03mm

PIN	Dimensions			PIN	Dimensions		
	A	B	C		A	B	C
4	8.30	2.40	3.86	20	21.10	15.20	16.66
5	9.10	3.20	4.66	21	21.90	16.00	17.46
6	9.90	4.00	5.46	22	22.70	16.80	18.26
7	10.70	4.80	6.26	23	23.50	17.60	19.06
8	11.50	5.60	7.06	24	24.30	18.40	19.86
9	12.30	6.40	7.86	25	25.10	19.20	20.66
10	13.10	7.20	8.66	26	25.90	20.00	21.46
11	13.90	8.00	9.46	27	26.70	20.80	22.26
12	14.70	8.80	10.26	28	27.50	21.60	23.06
13	15.50	9.60	11.06	29	28.30	22.40	23.86
14	16.30	10.40	11.86	30	29.10	23.20	24.66
15	17.10	11.20	12.66	31	29.90	24.00	25.46
16	17.90	12.00	13.46	32	30.70	24.80	26.26
17	18.70	12.80	14.26	33	31.50	25.60	27.06
18	19.50	13.60	15.06	34	32.30	26.40	27.86
19	20.30	14.40	15.86				

NOTES:

- MATERIAL:
 - HOUSING: LCP,COLOR:NATURE
 - AVTUATOR: LCP,COLOR:BLACK
 - CONTACT: PHOSPHOR BRONZE
 - PEG: BRASS
- PLATING:
 - CONTACT: GOLD PLATED ON NICKEL OVERALL
 - PEG: TIN PLATED ON NICKEL OVERALL
- RATING:
 - CURRENT RATING: 0.5A
 - VOLTAGE RATING: 50V AC
 - TEMPERATURE RANGE: -40°C~+85°C

ITEM NO.

DESCRIPTION

DRAWN

DATE

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY: Jack Lu

DATE: 11/07/25

CHECKED BY: Jacky Chen

DATE: 11/07/25

APPROVED BY: Tony Kao

DATE: 11/07/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

0.8mm FPC H:2.0mm 前掀盖

FPC08L-20xx-B2-S149

FPC08L-20xx-B2-S149

SIZE

VER

R