

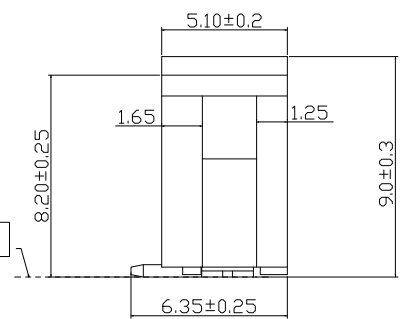
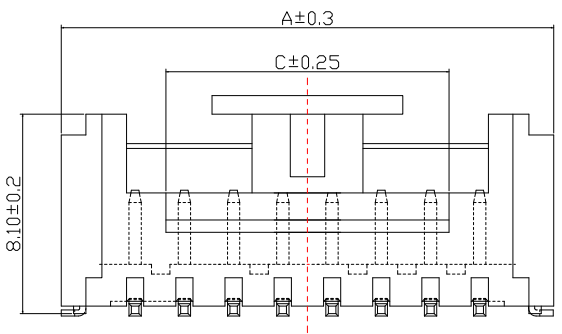
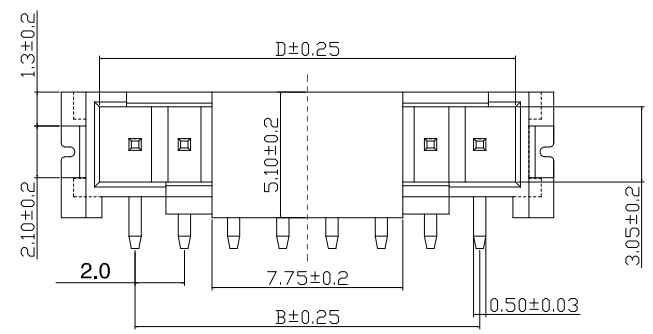


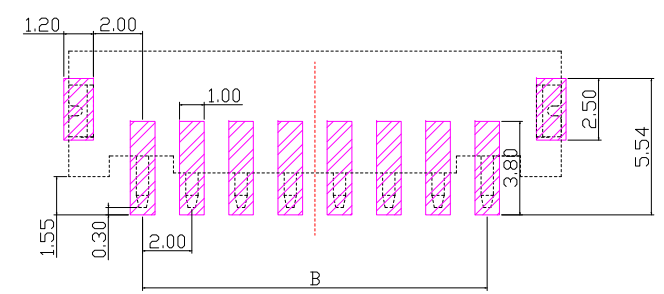

0.10 MAX

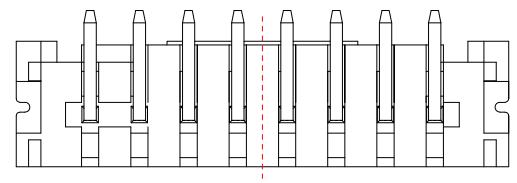

## P.C.B LAYOUT

### SPECIFICATIONS

- 1.Current rating : 1.0A AC , DC
  - 2.Voltage rating : 125V AC , DC
  - 3.Temperature rating : -40°C ~ +85°C
  - 4.Insulation resistance : 100MΩ min.
  - 5.Withstand voltage : 500V AC/minute
  - 6.Contact resistance : 20mΩ/Max
- Material:
- 1.Housing : LCP
  - 2.Contact : Brass,Tin plated over Nickel
  - 3.Solder Tab : Brass,Tin plated over Nickel

| PART NO. | A-(mm) | B-(mm) | C-(mm) | D-(mm) |
|----------|--------|--------|--------|--------|
| 02       | 8.00   | 2.00   | 2.70   | 4.75   |
| 03       | 10.00  | 4.00   | 3.20   | 6.75   |
| 04       | 12.00  | 6.00   | 3.50   | 8.90   |
| 05       | 14.00  | 8.00   | 5.50   | 10.90  |
| 06       | 16.00  | 10.00  | 7.50   | 12.90  |
| 07       | 18.00  | 12.00  | 9.50   | 14.90  |
| 08       | 20.00  | 14.00  | 11.50  | 16.90  |
| 09       | 22.00  | 16.00  | 13.50  | 18.90  |
| 10       | 24.00  | 18.00  | 15.50  | 20.90  |
| 11       | 26.00  | 20.00  | 15.50  | 22.90  |
| 12       | 28.00  | 22.00  | 15.50  | 24.90  |

|  |  |  |  |                        |  |  |  |                |              |        |          |                               |
|--|--|--|--|------------------------|--|--|--|----------------|--------------|--------|----------|-------------------------------|
|  |  |  |  | DRAWN BY: Jack Lu      |  |  |  | DATE: 01/08/26 | MAT'L        |        | TITLE    | CONNECTOR                     |
|  |  |  |  | CHECKED BY: Jacky Chen |  |  |  | DATE: 01/08/26 | FINISH       |        | MODLE    | WAFER P : 2.0mm SMT 180度 加CAP |
|  |  |  |  | APPROVED BY: Tony Kao  |  |  |  | DATE: 01/08/26 | SCALE: 1 : 1 |        | DWG NO.  | WF-2003VSxxC-S246             |
|  |  |  |  |                        |  |  |  |                | SHEET NO.    | 1 of 1 | PART NO. | WF-2003VSxxC-S246             |
|  |  |  |  |                        |  |  |  |                |              |        |          | SIZE: A4                      |
|  |  |  |  |                        |  |  |  |                |              |        |          | VER: R                        |

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2

Above 5 ~ 15 ±0.3

Above 15 ~ 30 ±0.4

Above 30 ~ 50 ±0.5

Angle ±0.3

3RD. ANGEL'S

UNITS

MM