


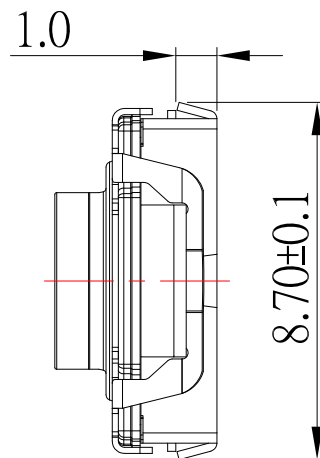
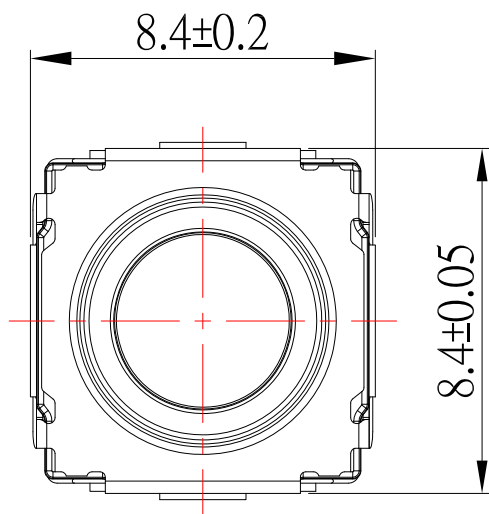


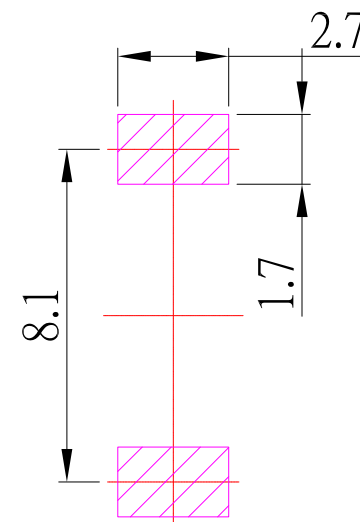

IP67



P.C.B MOUNTING PATTERN DIMENSION

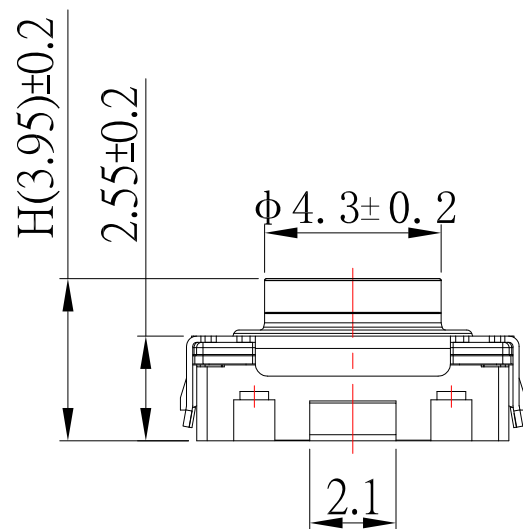

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA Max.
Contact Resistance	100mΩ Max.
Travel	0.90 ± 0.2mm
Operating Force	400 ± 80gf
Operating Life (cycles)	500,000

5	TERMINAL(端 子)	1	BRASS	Ag plating
4	HOUSING(基 座)	1	LCP	—
3	CONTACT FORM(弹 片)	1	SUS	Ag plating
2	COVER(盖板)	1	SUS	
1	STEM(按钮)	1	SILICONE	
NO	PART NAME	QTY	MATERIAL	REMARK



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

2	更新材質	Jack	091521
1	新增IP67標示	Jack	062421
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	09/15/21
CHECKED BY:	DATE
Jacky Chen	09/15/21
APPROVED BY:	DATE
Tony Kao	09/15/21

MATL		TITLE	SWITCH
FINISH		MODLE	TACT SWITCH Long Travel :0.9mm
SCALE	1 : 1	DWG NO.	TS-A69W-7-S138
SHEET NO.	1 of 1	PART NO.	TS-A69W-7-S138
		SIZE	A4
		VER	R2