

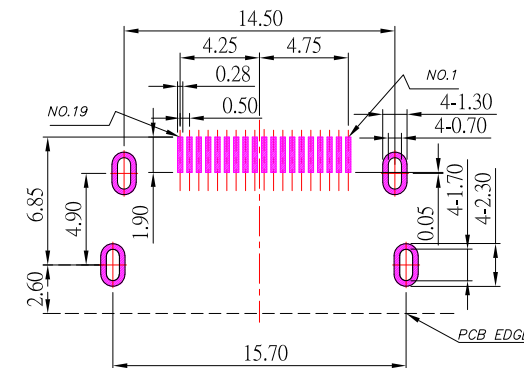
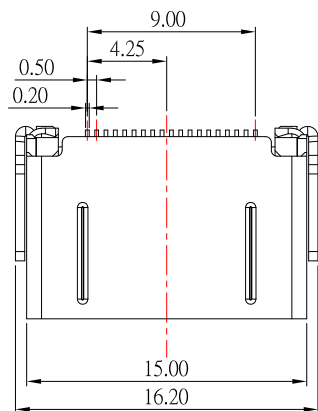
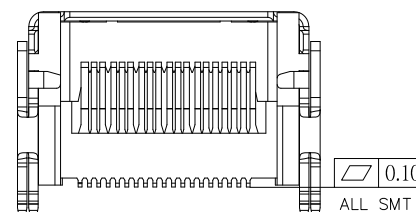


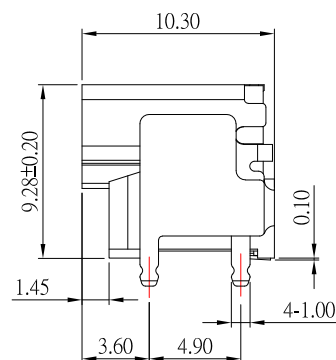

P.C.B. LAYOUT

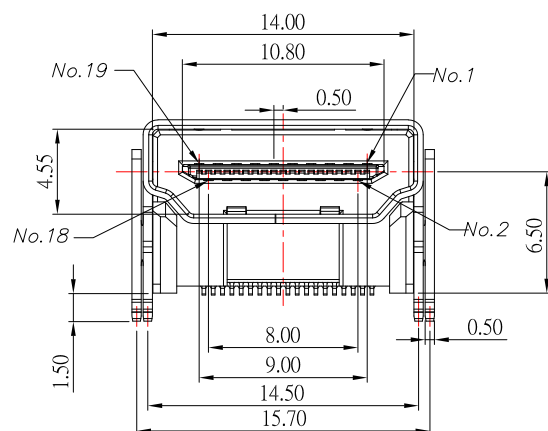

NOTE:

1.MATERIAL:

- 1.1 HOUSING: LCP,Black
- 1.2 CONTACT: BRASS
- 1.3 SHEEL: SUS

2.PLATING :

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.ELECTRICAL:

- 3.1 RATING: 40V , 0.5A
- 3.2 CONTACT RESISTANCE: 30 mΩ Max
- 3.3 INSULATION RESISTANCE: 100MΩ Min
- 3.4 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
- 3.5 OPERATING TEMPERATURE: -25°C~ 85°C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	07/08/26	FINISH		MODLE	HDMI AF SMT無柱 H9.28mm 外殼腳長1.50
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	HDMI-19P-SND29-S277
Jacky Chen	07/08/26	SHEET NO.	1 of 1	PART NO.	HDMI-19P-SND29-S277
APPROVED BY:	DATE				
Tony Kao	07/08/26				

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------