




USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use(SBU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

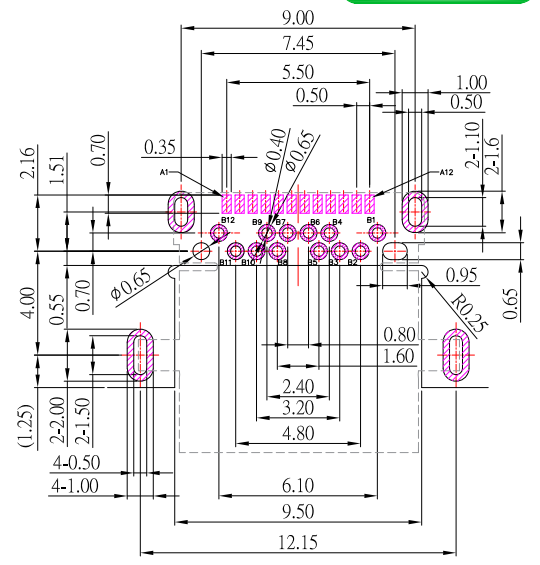

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS

Electrical:

- Rating: 5.0 A
- Dielectric Withstand Voltage: 100V AC
- Contact Resistance: 40 mΩ Max
- Insulation Resistance: 100 MΩ Min

Mechanical:

- Connector Mate and Unmate Force
 - Mate force: 5~20 N
 - Unmate force: 8~20 N

Material:

- Housing: LCP
 - Contact: C7025
 - Shell: SUS
- Finish:
- Contact: Plated Gold in Mating Area ; Gold Plated on Solder Balls ; Nickel under plated overall
 - Shell: Nickel under Plated surface layer



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

ITEM NO	DESCRIPTION	DRAWN	DATE
3	新增PCB LAYOUT尺寸	Jack	121223
2	更新圖面	Jack	102623
1	更新底部樣式	Jack	090123

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/12/23			
CHECKED BY:	DATE	FINISH	MODLE	USB4 GEN 3 TYPE CF Mid Mount CH0.33mm 3u"
Jacky Chen	12/12/23			
APPROVED BY:	DATE	SCALE	DWG NO.	SBC-240M23H-451-S410
Tony Kao	12/12/23	1 : 1	PART NO.	SBC-240M23H-451-S410
		SHEET NO.	1 of 1	