





# PH-C12-x2xxx-S304



Insulator Material: 3 : PA6T  
4 : PA9T

PIN數

	L1	L2	L3	L4	L5
A	3.0	1.0	2.3	3.4	0.6
B	1.7	1.5	1.7	3.4	2.1
C	4.5	2.5	2.8	3.0	0.6
D	3.0	1.0	2.8	3.4	0.6
E	3.0	1.5	3.0	3.4	2.1
F	1.5	1.0	3.15	3.4	0.9
G	3.0	2.0	3.0	3.0	1.0

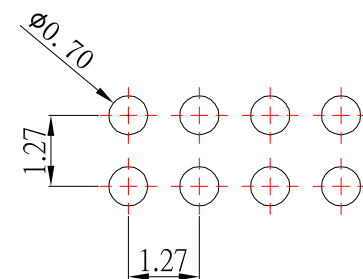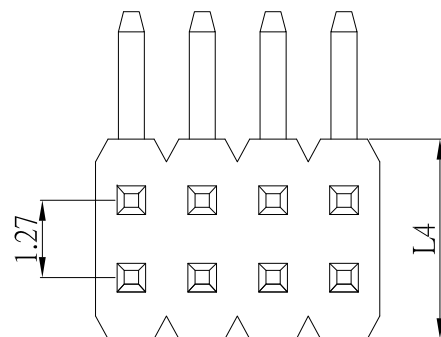

Recommended P.C.B Layout

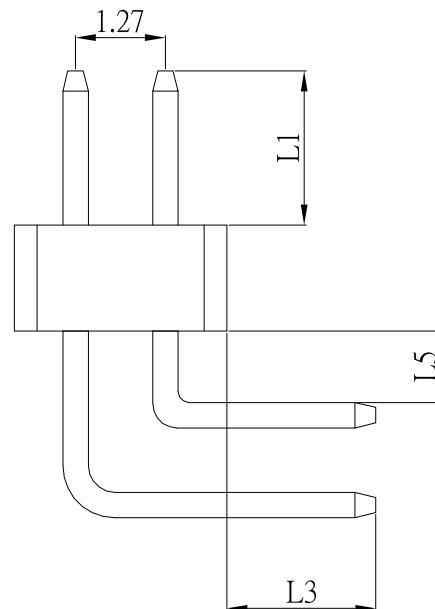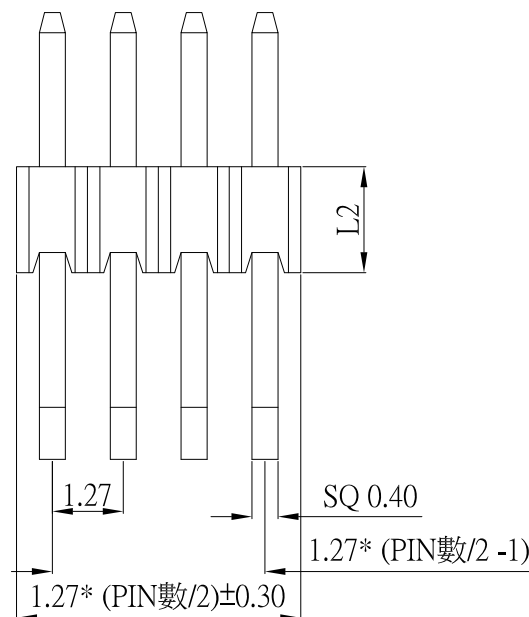

## MATERIAL:

- 1.Contact Material: Brass
- 2.Insulator Material: Polyester
- 3.Contact Plating: Gold Plated

## ELECTRICAL:

- 1.Current Rating: 1.0 Amps/contact max.
- 2.Contact Resistance:  $\leq 20\text{m}\Omega/\text{contact}$ .
- 3.Insulator Resistance:  $\geq 1,000\text{ M}\Omega$
- 4.Withstanding Voltage: 500V AC/ minute.

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	新增尺寸和材質選項	Jack	112221
4	新增選項	Jack	060519
3	更新尺寸	Jack	092618
2	更新算式	Jack	031017
1	更新選項	Jack	041316

**CONTACT** 建倚科技股份有限公司  
**CONTACT TECHNOLOGY CORP.**

TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MATL	TITLE	Pin Header
Jack Lu	11/22/21			
CHECKED BY:	DATE	FINISH	MODLE	1.27 排針雙排90度 2*X PIN數
Jacky Chen	11/22/21			
APPROVED BY:	DATE	SCALE	DWG NO.	PH-C12-x2xxx-S304
Tony Kao	11/22/21	1 : 1		
		SHEET NO.	PART NO.	PH-C12-x2xxx-S304
		1 of 1		
				SIZE A4
				VER R5